
CONP	Product Information	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang
	CDMF1-12	Contact	86-571-88637351
		Date	2022/06/19
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

	1100140725	
Product Picture		Note
		Based on the structure of CDMF light vertical multistage centrifugal pump, this product adds a cooling device, which is suitable for liquids with a maximum temperature of 180. The liquid can be cooled to 120 or lower before reaching the shaft seal through the cooling device, which effectively ensures the safe working temperature of the mechanical seal and avoids the damage caused by high temperature to the motor. The product has ultra-high performance of CDMF, MEI≥0.7.IE3 ultra- efficient motor makes whole machine more efficient, energy-saving and environmental friendly.
technology		
Pump rotator speed		2900
Nameplate standards		CE
Pump version		1
Material		
Impeller		304
Rubber code		D
Inlet&outlet chamber		304
Material Code		s
Installation		
Connection Code		F
Maximum Pressure/Te	mperatu	25 bar / 180
Maximum Pressure/Te		25 bar / -15
Flange Standard		DIN
Pressure Class		PN25
Inlet & outlet		DN25
Medium		
Medium Temperature	high t	-15+180
Maximum Environmen	-	40
Motor		
Motor Number of Motor Phas	e	Three Phase
Protection Class	~	IP55
Insulation Class		F
Motor Power		' 0.75КW
Power Frequency		50HZ
Rated Voltage (V)		220/380V
Rated Current (A)		3.0/1.7A
Energy Efficiency Level		IE3
Seal		
Mechanical Seal		CDLA-12/WBF14
Others		

	Performance Curve	Manufacturer	CNP
			Yuhang District, Hangzhou, Zhejiang,
CNP	CDMF1-12	Contact	86-571-88637351
		Date	2022/06/19
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

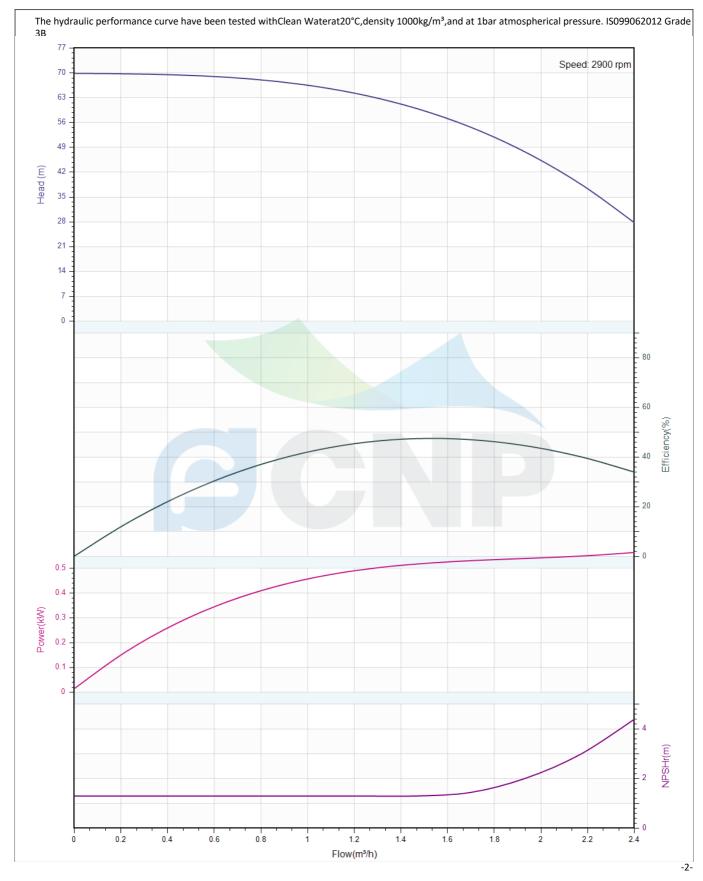

CONP	Pump Technical Parameters	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDMF1-12	Contact	86-571-88637351
		Date	2022/06/19
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Rated parameters		77 70 Speed 2000 rpm
Pump model	CDMF1-12	
Part NO.	1100140725	
Rated flow (m ³ /h)	1	Head
Rated head (m)	66	21
Rated efficiency (%)	42	
Power (kW)	0.428	
NPSHr (m)	1.3	
Speed (rpm)	2900	
Max impeller diameter (mm)	74.5	
Medium		
Pumped medium	Clean Water	
Working temperature (°C)	20	1 (00 01) (00) (

1000

1


Medium density (kg/m³)

Viscosity (mm²/s)

Efficiency(%)

(m)HSHN

CNP	Structure picture	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang
	CDMF1-12	Contact	86-571-88637351
		Date	2022/06/19
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

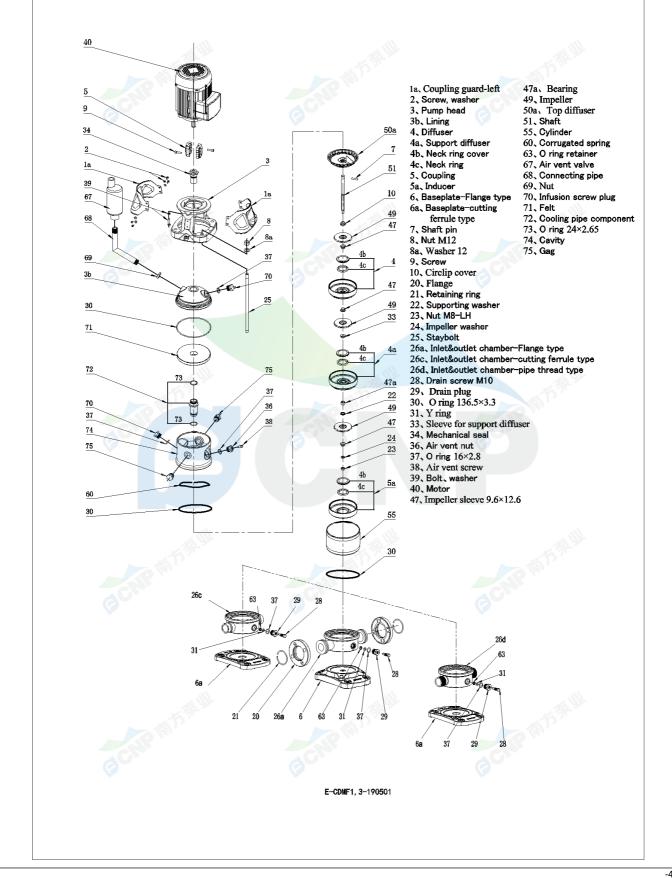

	Dimension Drawing	Manufacturer	CNP
CNP		Address	Yuhang District, Hangzhou, Zhejiang,
	CDMF1-12	Contact	86-571-88637351
		Date	2022/06/19
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

