
CONP	Product Information	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang
	CDMF5-25	Contact	86-571-88637351
	CDIVIT J-ZJ	Date 2022/06/19	2022/06/19
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	
• • • •			

Product Picture	290 CE 1 304 D 304	
Pump rotator speed Nameplate standards Pump version Material Impeller Rubber code Inlet&outlet chamber Material Code	CE 1 304 D	pump, this product adds a cooling device, which is suitable for liquids with a maximum temperature of 180. The liquid can be cooled to 120 or lower before reaching the shaft seal through the cooling device, which effectively ensures the safe working temperature of the mechanical seal and avoids the damage caused by high temperature to the motor. The product has ultra-high performance of CDMF, MEI≥0.7.IE3 ultra- efficient motor makes whole machine more efficient, energy-saving and environmental friendly.
Pump rotator speed Nameplate standards Pump version Material Impeller Rubber code Inlet&outlet chamber Material Code	CE 1 304 D	
Pump rotator speed Nameplate standards Pump version Material Impeller Rubber code Inlet&outlet chamber Material Code	CE 1 304 D	
Nameplate standards Pump version <b>Material</b> Impeller Rubber code Inlet&outlet chamber Material Code	1 304 D	
Material Impeller Rubber code Inlet&outlet chamber Material Code	304 D	
Impeller Rubber code Inlet&outlet chamber Material Code	D	
Impeller Rubber code Inlet&outlet chamber Material Code	D	
Rubber code Inlet&outlet chamber Material Code	D	
Inlet&outlet chamber Material Code		
Material Code	504	
Installation	S	
Installation		
Connection Code	F	
Maximum Pressure/Temp		par / 180
Maximum Pressure/Temp		par / -15
Flange Standard Pressure Class	DIN PN2	
Inlet & outlet	DN3	
Medium		
Medium Temperature high t -15+180		+180
Maximum Environment Te	emper 40	
Motor		
Number of Motor Phase	Thr	ee Phase
Protection Class	IP55	5
Insulation Class	F	
Motor Power	4KV	V
Power Frequency	50H	IZ
Rated Voltage (V)	380	V
Rated Current (A)	7.8/	A
Energy Efficiency Level	IE3	
Seal		
Mechanical Seal	CDL	A-12/WBF14
Others		
Weight (kg)	68	


CONP	Performance Curve	Manufacturer	CNP
	renormance curve	Address	Yuhang District, Hangzhou, Zhejiang,
	CDMF5-25	Contact	86-571-88637351
	CDIVII J-2J	Date	2022/06/19
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

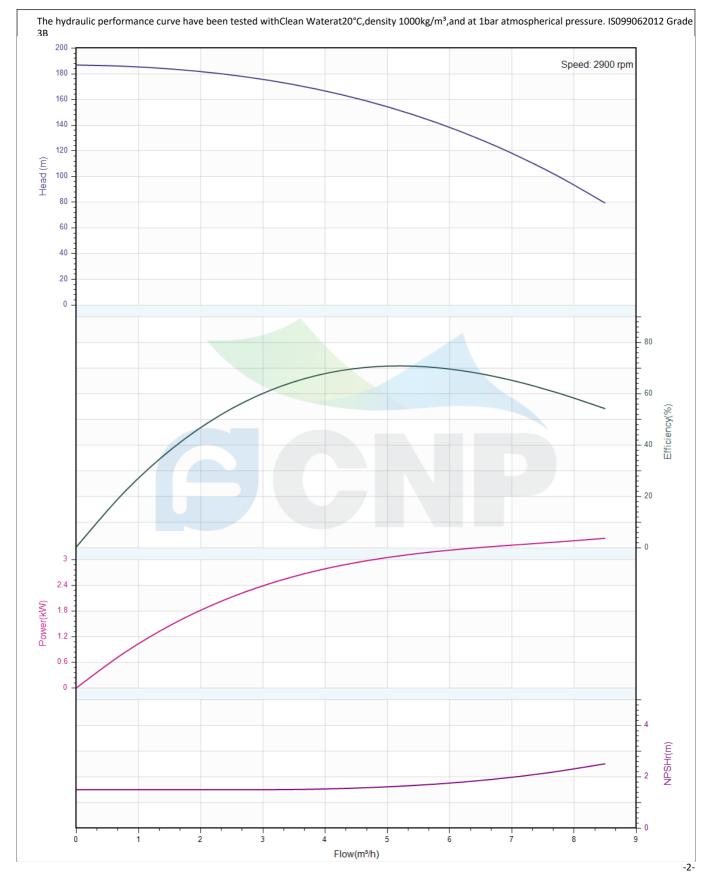


CNP	Pump Technical Parameters	Manufacturer	CNP
	Fump reclinical Parameters	Address	Yuhang District, Hangzhou, Zhejiang
	CDMF5-25	Contact	86-571-88637351
		Date	2022/06/19
Project Name		Client Name	DPA
FIOJECTIVALLE		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Rated parameters			
Pump model	CDMF5-25		
Part NO.	1100141053		
Rated flow (m <sup>3</sup> /h)	5		
Rated head (m)	155		
Rated efficiency (%)	70		
Power (kW)	3.02		
NPSHr (m)	1.6		
Speed (rpm)	2900		
Max impeller diameter (mm)	82		


Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

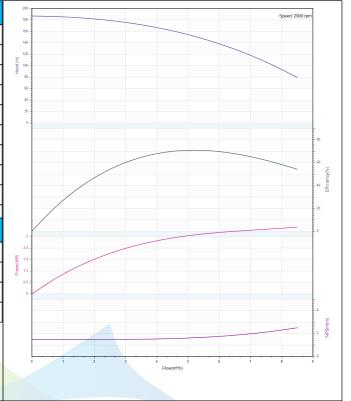

CNP	Structure picture	Manufacturer	CNP
	Structure picture	Address	Yuhang District, Hangzhou, Zhejiang
	CDMF5-25	Contact	86-571-88637351
		Date	2022/06/19
Project Name		Client Name	DPA
FIOJECTINAILIE		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

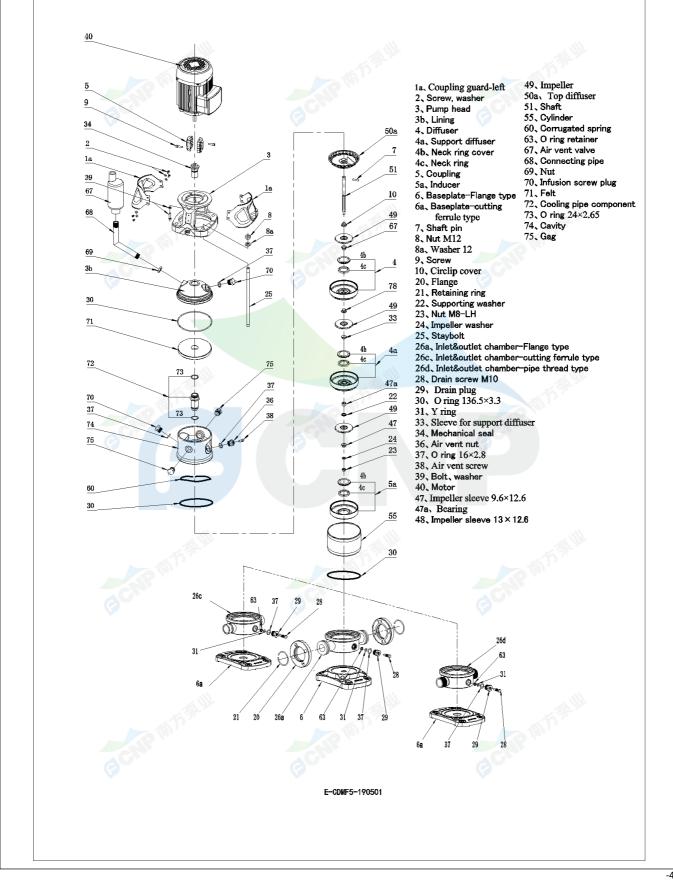

CONP	Dimension Drawing	Manufacturer	CNP
	Dimension Drawing	Address	Yuhang District, Hangzhou, Zhejiang
	CDMF5-25	Contact	86-571-88637351
		Date	2022/06/19
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

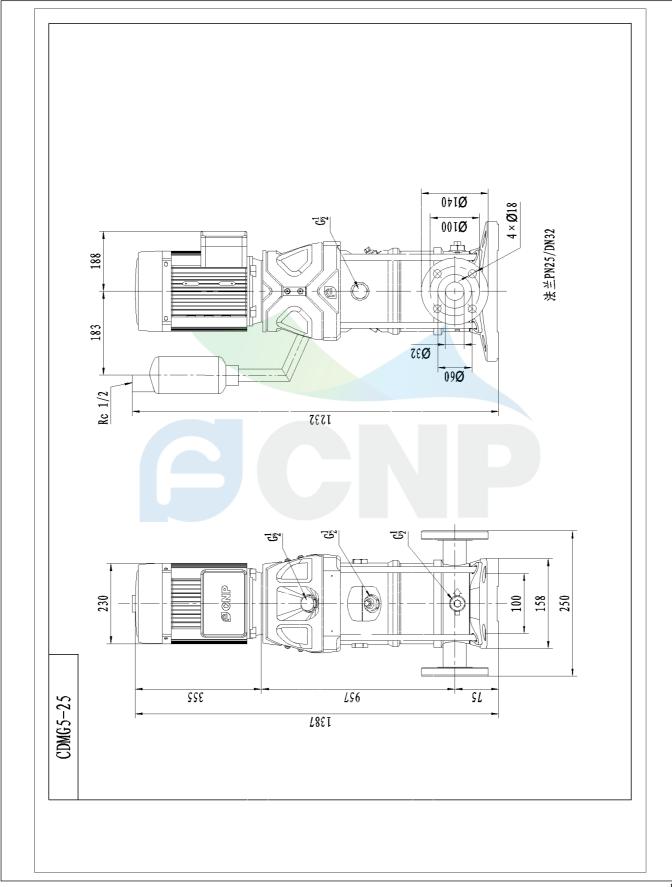

-5-