
	Product information	Manufacturer	CNP
		Address	Yuhang District, Hangzhou,
COND	TD250-12.5/4	Contact	86-571-88637351
		Date	2022/03/09
Project Name		Client Name	DPA
		Client Addr.	
Station Number		Contacts	Alireza
		Contact	

Product No. 1100040	0683	
Product picture(Note:the picture	may not be the same as the	Series description
		Product introduction
		Single stage in-line centrifugal pumps,inlet and outlet are horizontal with top side pulled out structure and can be repaired without removing the pipelines. Performance and advantages Compact structure Maintenance convenience Low noise Both cast iron and stainless steel impeller are available Application range
technology		
Pump rotator speed	1480	
Pump version	Easy-disassemble Type	
Material		
Impeller	HT200	
Pump body	HT200	
Rubber code	NBR	
Rubber Code	NDK	
Installation		
Connection Code	F	
Maximum Operation Pressure	PN12	
Medium Medium Temperature Structure dimension Inlet & outlet size types Inlet & Outlet Bore	-15~110 DN 250	
Rotation Direction	Clockwise rotation view	ed from motor end
• • •		
Motor	Thursd Diverse	
Number of Motor Phase	Three Phase	
Protection Class	IP55	
Insulation Class Motor Power	F	
	30 50Hz	
Power Frequency		
Rated Voltage (V) Energy Efficiency Level	380V	
Lifergy Enricency Level	IE3	
Seal		
Mechanical Seal	TD5-43/BSE4	
Others		
Weight (kg)	552	
0 10		

	Performance Curve TD250-12.5/4	Manufacturer	CNP
		Address	Yuhang District, Hangzhou,
COND		Contact	86-571-88637351
		Date	2022/03/09
Project Name		Client Name	DPA
		Client Addr.	
Station Number		Contacts	Alireza
		Contact	

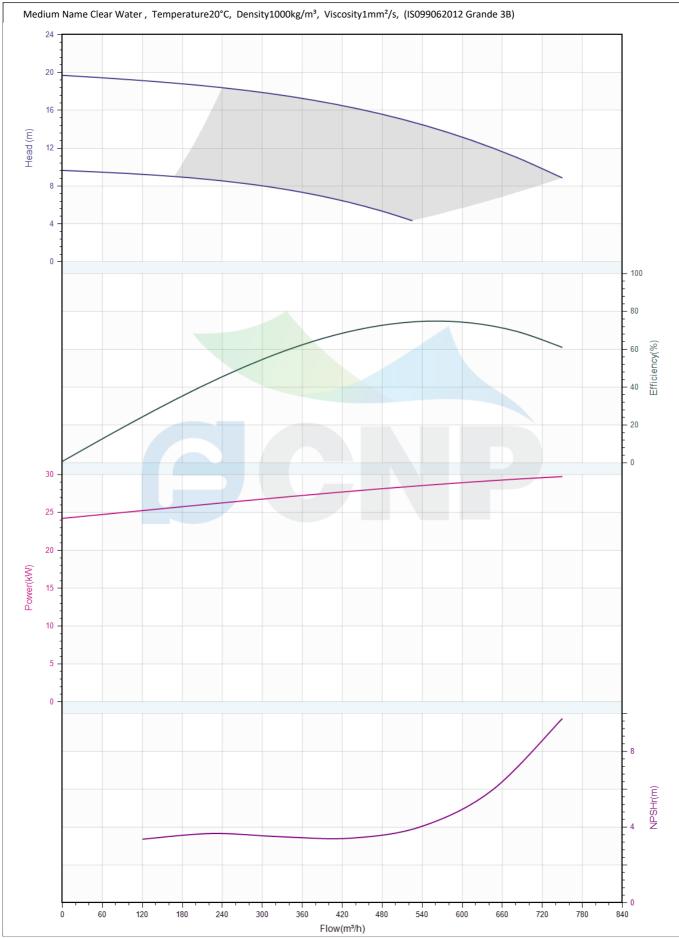

Pump technical parameters	Manufacturer	CNP
	Address	Yuhang District, Hangzhou,
TD250-12.5/4	Contact	86-571-88637351
	Date	2022/03/09
	Client Name	DPA
	Client Addr.	
	Contacts	Alireza
	Contact	
	• •	Pump technical parameters Address TD250-12.5/4 Contact Date Client Name Client Addr. Contacts

Rated parameters		24
Pump model	TD250-12.5/4	5
Product No.	1100040683	
Rated flow(m ³ /h)	630	
Rated pressure(m)	12.5	
Rated efficiency(%)	76	
Power(kW)	28.24	
NPSHr(m)	5.5	
Speed(rpm)	1480	
Max impeller diameter(mm)	260	
Medium		22 (00) 15 15
Medium Name	Clear Water	
Working temperature(°C)	20	


1000

1

Medium density(kg/m³) Viscosity(mm²/s) Efficiency(%)

NPSHr(m)

Structure picture TD250-12.5/4	Structuro picturo	Manufacturer	CNP
	Address	Yuhang District, Hangzhou,	
	TD250-12.5/4	Contact	86-571-88637351
		Date	2022/03/09
Project Name		Client Name	DPA
		Client Addr.	
Station Number		Contacts	Alireza
		Contact	

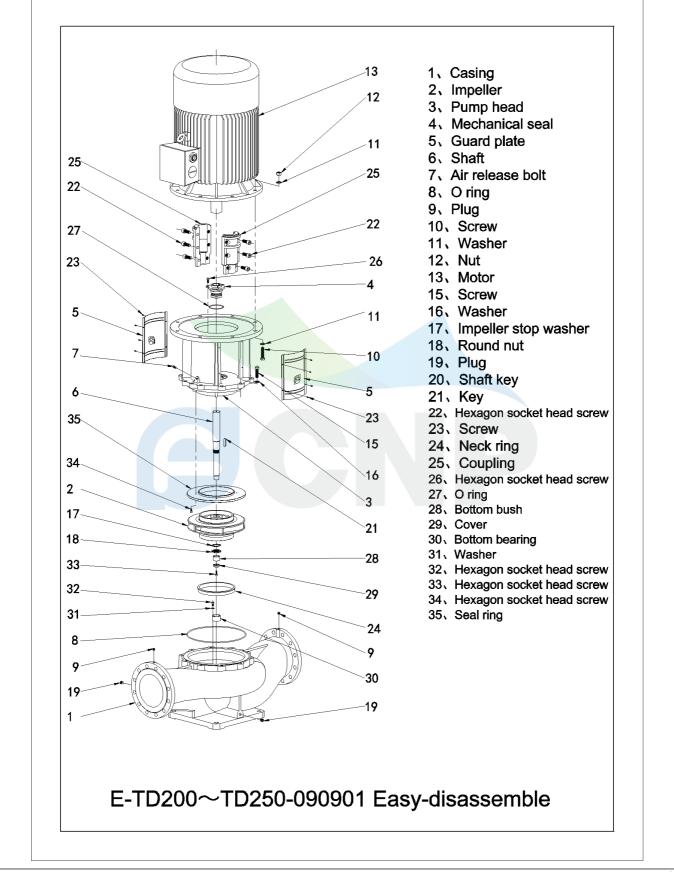

	Size picture	Manufacturer	CNP
	Size picture	Address	Yuhang District, Hangzhou,
	TD250-12.5/4	Contact	86-571-88637351
		Date	2022/03/09
Project Name		Client Name	DPA
		Client Addr.	
Station Number		Contacts	Alireza
		Contact	

