

**Receiver**
**From**

 Society  
 Reference  
 Address  
 Phone  
 Fax  
 E-mail

**Item n° :**

1D7411BEX

**Model :**

NKM-G 125-250/266/A/BAQE/22/4 IE3

**Pump data**

Impeller size (mm) : 266

MEI ≥ 0,40

Pressure rating : PN 16

Min. fluid temperature : 14 °F

Max. fluid temperature : 284 °F

Max. Ambient temperature : 104 °F

**Requested data**

Flow : 0/00 US g.p.m.

Head : 0/00 m

Fluid (%) : Water, pure

Fluid Temperature : 68 °F

 Density : 62/322 lb/ft<sup>3</sup>

 Kinematic viscosity : 1/0818E-5 ft<sup>2</sup>/s

Vapor pressure : 2/34 kPa

**Real duty point**

Flow :

Head :

NPSH :

Shaft power P2 :

Efficiency :

**Materials**

Pump body : Cast iron 250 UNI ISO 185

Support : Cast iron 250 UNI ISO 185

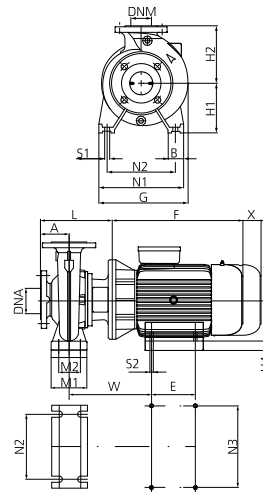
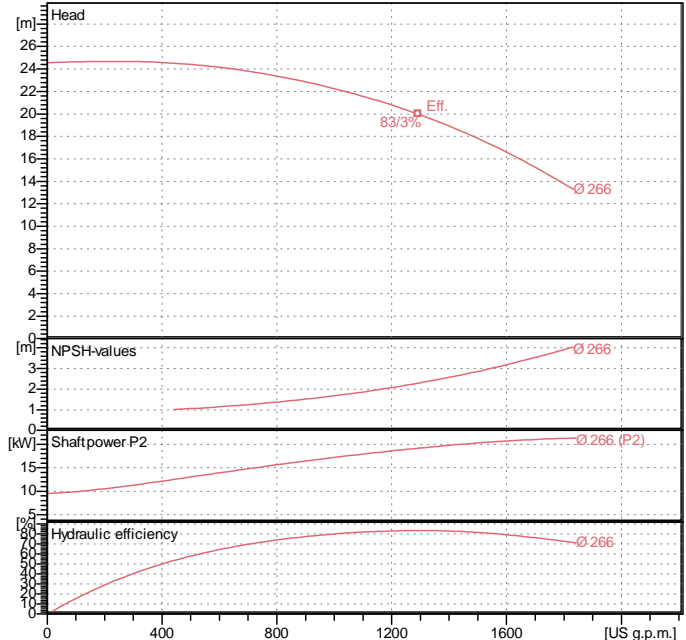
Impeller : Cast iron 250 UNI ISO 185

Mechanical seal : SEE "SHAFT SEAL" SECTION

OR ring : Ethylene propylene (EPDM)

Pump shaft : AISI 304 X5 Cr Ni 1810 UNI 6900/71

Motor : AISI 304 X5 Cr Ni 1810 UNI 6900/71

**Curve tolerance according to ISO 9906**

**Weight :** 309 kg

**Dimensions in mm**

A	140	H1	250	N2	315
B	80	H2	355	N3	279
DNA	150	H4	70	S1	M14
DNM	125	L	413	S2	M12
E	279	M1	160	W	394
F	580	M2	120	X	140
G	472	N1	400		

**Pump connection**

Suction side : DN 150 / PN 16

Discharge side : DN 125 / PN 16

**Motor data**

Nominal power P2 : 22 kW

Rated speed : 1470 rpm

Rated voltage : 3~ 400 V

50 Hz

Nominal current : 40/5 A

Degree of protection : IP 55