

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

60180180

Model :

NKV 10/9 T IE3

Pump data

MEI ≥ 0,60

Max pressure : 362/58 psi

Min. fluid temperature : 5 °F

Max. fluid temperature : 248 °F

Max. Ambient temperature : 104 °F

Requested data

Flow : 0/00 US g.p.m.

Head : 0/00 m

Fluid (%) : Water, pure

Fluid Temperature : 68 °F

 Density : 62/322 lb/ft³

 Kinematic viscosity : 1/0818E-5 ft²/s

Vapor pressure : 2/34 kPa

Hydraulic data (duty point)

Flow :

Head :

NPSH :

Shaft power P2 :

Efficiency :

Materials

Pump body - external : Cast iron with cataphoresis

Pump body - internal : Stainless Steel (AISI 304)

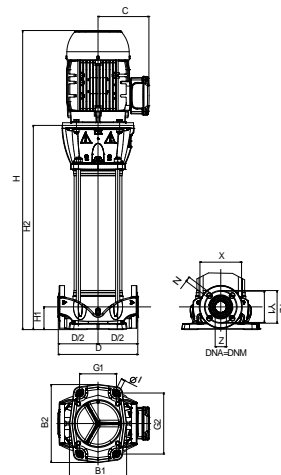
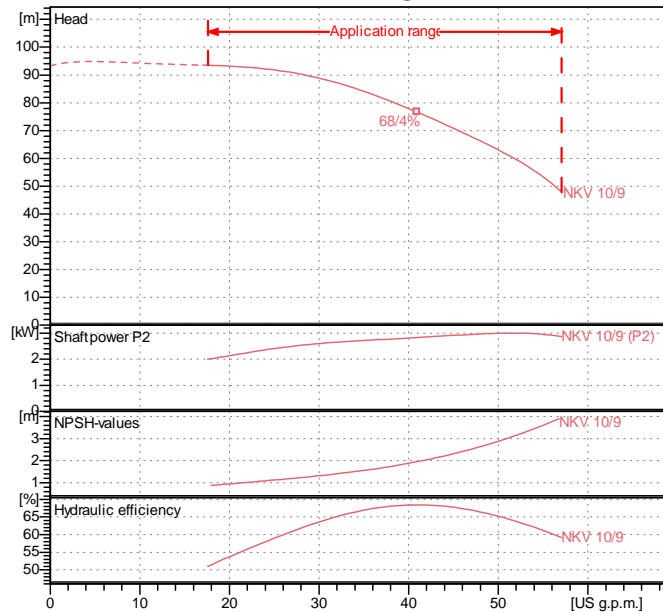
Support : Cast iron with cataphoresis

Diff user : Technopoly mer "ULTEM"

Pump shaft : AISI 431

Impeller : Stainless Steel (AISI 304)

Mechanical seal : Cartridge SiC/Graphite/EPDM

Curve tolerance according to ISO 9906

Weight : 67 kg

Motor data

Nominal power P2 : 3 kW

Rated speed : 2882 rpm

Rated voltage : 3~ 400 V 50 Hz

Nominal current : 5/85 A

Degree of protection : IP 55

Dimensions in mm

B1	201	I	13/5
B2	274	N	17/5
C	180	X	150
D	280	Y1	110
D2	140	Y2	115
DNA	DN 40	Z	40
DNM	DN 40		
G1	130		
G2	215		
H	847/8		
H1	80		
H2	604/4		

Pump connection

Suction side : DN 40 / PN 25

Discharge side : DN 40 / PN 25