

Receiver

Society
 Reference
 Address
 Phone
 Fax
 E-mail

From

Item n° :

60183413

Model :

KVC 45/30 M Y17

Pump data

MEI ≥ 0,40

Pressure rating : 12 bar (1200 KPa)

Min. fluid temperature : 32 °F

Max. fluid temperature : 104 °F

Max. Ambient temperature : 104 °F

Requested data

Flow : 0/00 US g.p.m.

Head : 0/00 m

Fluid : Water, pure

Fluid Temperature : 68 °F

 Density : 62/322 lb/ft³

 Kinematic viscosity : 1/0818E-5 ft²/s

Vapor pressure : 2/34 kPa

Hydraulic data (duty point)

Flow :

Head :

NPSH :

Shaft power P2 : 0/65 kW

Efficiency : - %

Materials

Impeller Technopoly mer B

Diff user Technopoly mer B

Shaft with rotor AISI 303 X10 CrNiS 1809 UNI 6900/71


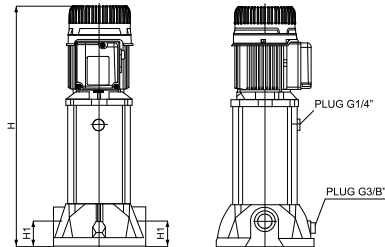
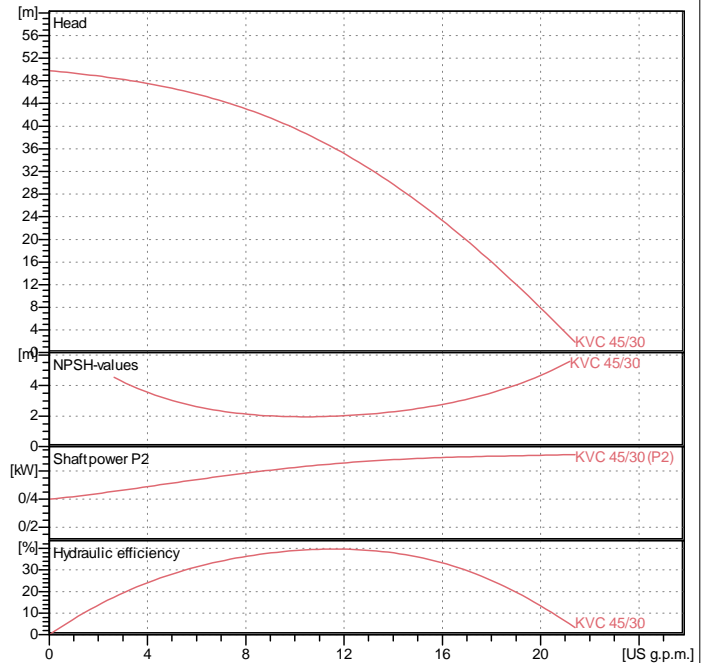
External sleeve AISI 304 X5 Cr Ni 1810 UNI 6900/71

Seal disk AISI 304 X5 Cr Ni 1810 UNI 6900/71

Mechanical seal Silicon carbide/Carbon

OR ring EPDM Rubber

Curve tolerance according to ISO 9906


Weight : 14/9 kg

Motor data

Motor brand : DAB

Nominal power P2 : 0/65 kW

Rated speed : 2859 rpm

Rated voltage : 1- 230 V 50 Hz

Nominal current : 5/22 A

Degree of protection : IP 55

Dimensions in mm

? I	9
A	221
B	250
DNA	1"1/4 G
DNM	1"1/4 G
F	170
H	560
H1	60

Pump connection

Suction side : 1 " 1/4 G 12 bar (1200 KPa)

Discharge side : 1 " 1/4 G 12 bar (1200 KPa)