

Receiver
From

Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

60161481.

Model :

K 40/19 HA

Pump data

Pressure rating : 4 bar (400 KPa)
 Min. fluid temperature : 32 °F
 Max. fluid temperature : 212 °F
 Max. Ambient temperature : 131 °F

Requested data

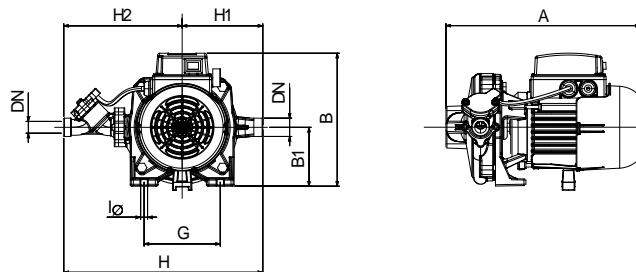
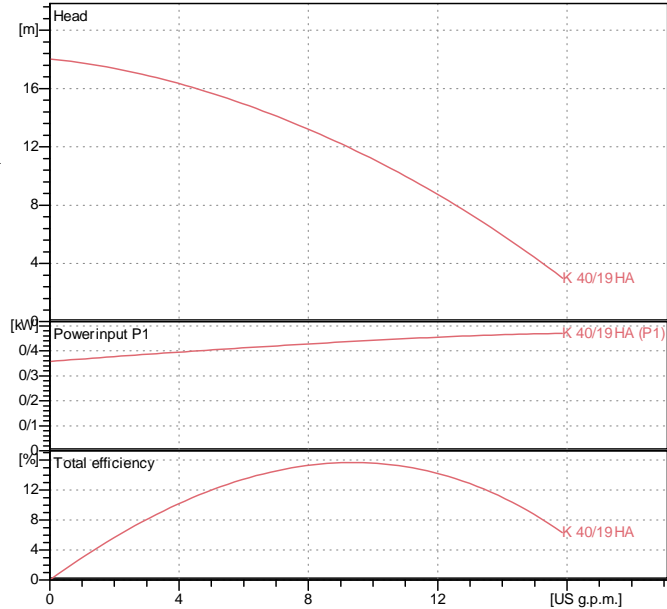
Flow : 0/00 US g.p.m.
 Head : 0/00 m
 Fluid : Water, pure
 Fluid Temperature : 68 °F
 Density : 62/322 lb/ft³
 Kinematic viscosity : 1/0818E-5 ft²/s
 Vapor pressure : 2/34 kPa

Hydraulic data (duty point)

Flow :
 Head :
 NPSH :
 Shaft power P2 :
 Efficiency :

Materials

Pump body : Cast iron with cataphoresis
 Support : Cast iron with cataphoresis
 Impeller : Technopoly mer B
 Mechanical seal : Carbon/Ceramic
 OR ring : NBR Rubber
 Shaft with rotor : AISI 416 X12 CrS 13 UNI 6900/71

Curve tolerance according to ISO 9906


Weight : 8/9 kg

Motor data

Motor brand : DAB
 Power input P1 : 0/47 kW
 Rated speed : 2800 rpm
 Rated voltage : 1~ 220-230 V 50 Hz
 Nominal current : 2/25 A
 Degree of protection : IP 44

Dimensions in mm

A : 280/5
 B : 192
 B1 : 85
 DN : 3/4" G
 G : 110
 H : 287/5
 H1 : 116/5
 H2 : 171
 I? : 9/5

Pump connection

Suction side : 3/4" G / 4 bar (400 KPa)
 Discharge side : 3/4" G / 4 bar (400 KPa)