

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

60160878.

Model :

K 40/22 HA

Pump data

Pressure rating : 4 bar (400 KPa)

Min. fluid temperature : 32 °F

Max. fluid temperature : 212 °F

Max. Ambient temperature : 131 °F

Requested data

Flow : 0/00 US g.p.m.

Head : 0/00 m

Fluid : Water, pure

Fluid Temperature : 68 °F

 Density : 62/322 lb/ft³

 Kinematic viscosity : 1/0818E-5 ft²/s

Vapor pressure : 2/34 kPa

Hydraulic data (duty point)

Flow :

Head :

NPSH :

Shaft power P2 :

Efficiency :

Materials

Pump body Cast iron with cataphoresis

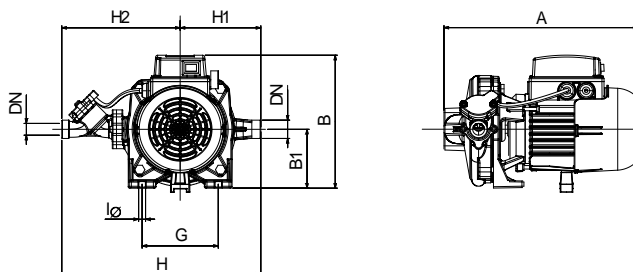
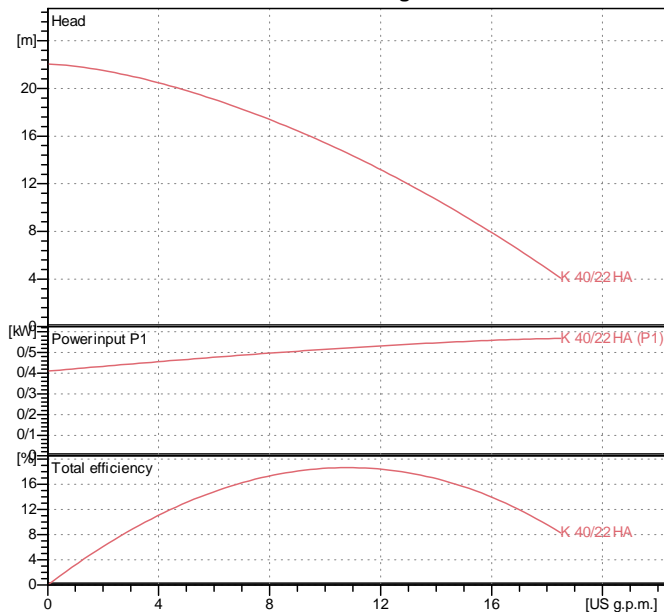
Support Cast iron with cataphoresis

Impeller Technopolymer B

Mechanical seal Carbon/Ceramic

OR ring NBR Rubber

Shaft with rotor AISI 416 X12 CrS 13 UNI 6900/71

Curve tolerance according to ISO 9906

Weight : 8/9 kg

Motor data

Motor brand : DAB

Power input P1 : 0/57 kW

Rated speed : 2800 rpm

Rated voltage : 1~ 220-230 V 50 Hz

Nominal current : 2/54 A

Degree of protection : IP 44

Pump connection

Suction side : 3/4" G / 4 bar (400 KPa)

Discharge side : 3/4" G / 4 bar (400 KPa)

Dimensions in mm

A	280/5
B	192
B1	85
DN	3/4" G
G	110
H	287/5
H1	116/5
H2	171
I?	9/5