

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

102970330

Model :

EUROINOX 25/80 T

Pump data

 Pressure rating : 8 bar (800 kPa)
 Min. fluid temperature : 32 °F
 Max. fluid temperature : 95 °F
 Max. Ambient temperature : 104 °F

Requested data

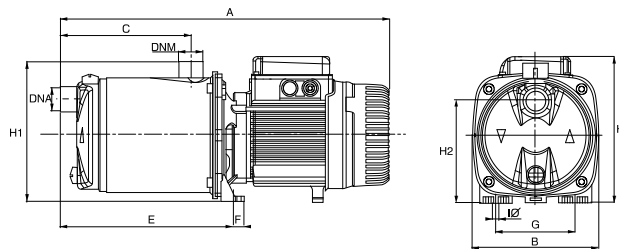
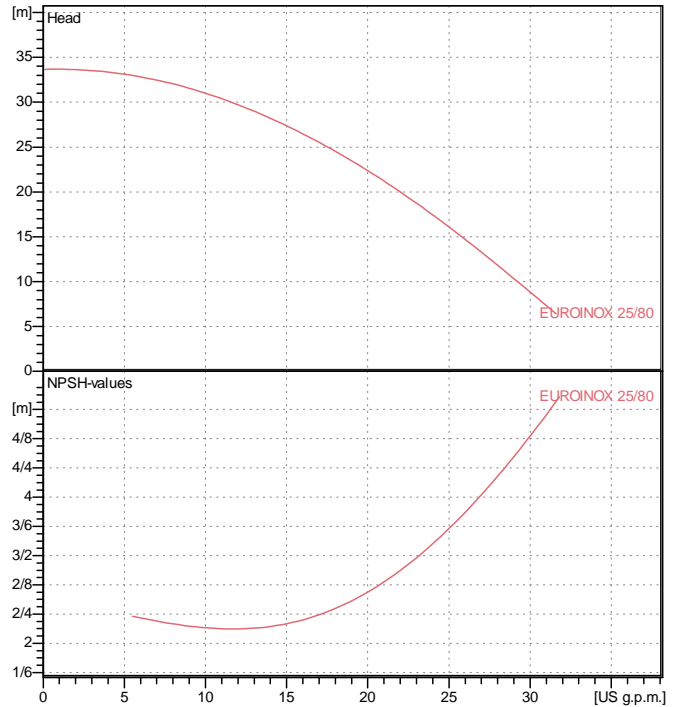
 Flow : 0/00 US g.p.m.
 Head : 0/00 m
 Fluid : Water, pure
 Fluid Temperature : 68 °F
 Density : 62/322 lb/ft³
 Kinematic viscosity : 1/0818E-5 ft²/s
 Vapor pressure : 2/34 kPa

Hydraulic data (duty point)

 Flow :
 Head :

Materials

Pump body	AISI 304 X5 Cr Ni 1810 UNI 6900/71
Impeller	Technopolymer
Shaft with rotor	AISI 304 X5 Cr Ni 1810 UNI 6900/71
OR ring	NBR
Diffuser	Technopolymer
Mechanical seal	Carbon/Ceramic
Disc seal	AISI 304 X5 Cr Ni 1810 UNI 6900/71

Curve tolerance according to ISO 9906

Motor data

Motor brand :	DAB
Nominal power P2 :	0/55 kW
Rated speed :	2850 rpm
Rated voltage :	3~ 400 V / 230 V 50 Hz
Nominal current :	1/6 / 2/8 A
Degree of protection :	IP 44

Weight : 10/7 kg

Dimensions in mm

A	384	DNM	1" G	H	193		
B	174	E	186	H1	196		
C	108	F	13/5	H2	143		
DNA	1" G	G	111	I?	9		

Pump connection

 Suction side : 1" G / 8 bar (800 kPa)
 Discharge side : 1" G / 8 bar (800 kPa)