

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

103005814

Model :

NOVA 600 T-NA SV

Pump data

 Free passage : 10 mm
 Pressure rating :
 Min. fluid temperature : 32 °F
 Max. fluid temperature : 95 °F
 Max. Ambient temperature : 104 °F

Requested data

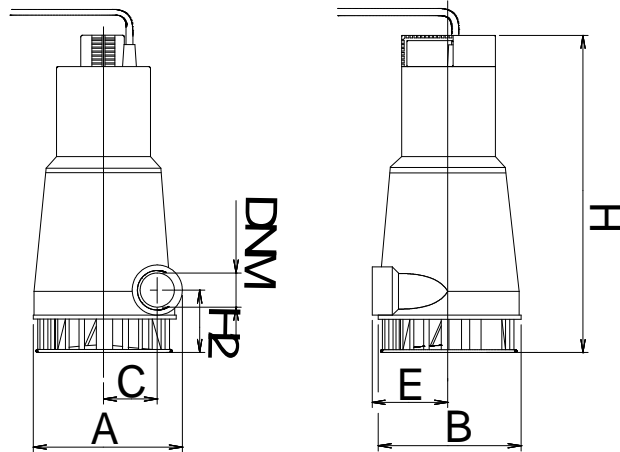
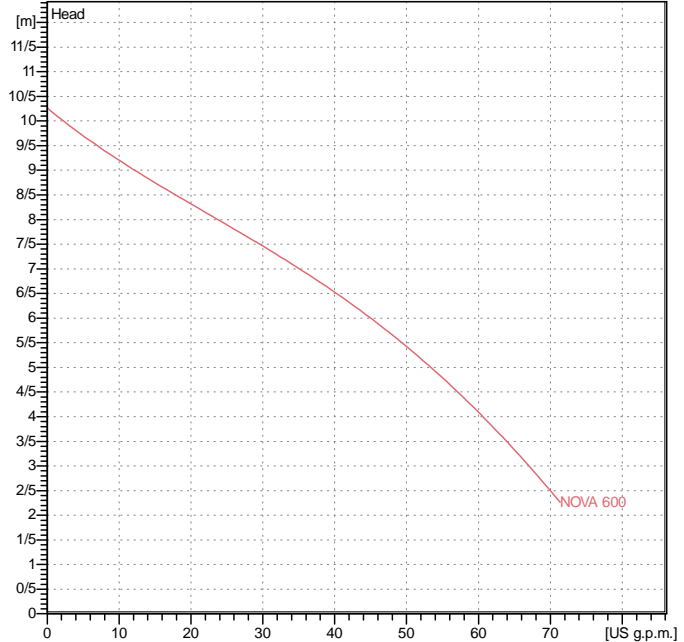
 Flow : 0 US g.p.m.
 Head : 0 m
 Fluid : Water, pure
 Fluid Temperature : 68 °F
 Density : 62/322 lb/ft³
 Kinematic viscosity : 1/0818E-5 ft²/s
 Vapor pressure : 2/337 kPa

Hydraulic data (duty point)

 Flow :
 Head :

Materials

 Pump body : Technopolymer
 Impeller : Technopolymer
 OR ring : NBR Rubber
 Motor top body : AISI 304 X5 Cr Ni 1810 UNI 6900/71
 Rotor shaft : AISI 431
 Seeger ring : 12E - UNI 7435 STAINLESS
 Suction strainer : Technopolymer

Curve tolerance according to ISO 9906

Motor data
Weight : 6/7 kg

 Motor brand : DAB
 Nominal power P2 : 0/55 kW
 Rated speed : 2850 rpm
 Rated voltage : 3~ 400 V
 Nominal current : 1/6 A
 Degree of protection : IP 68

50 Hz

Dimensions in mm

Dimension	Value				
A	162				
B	165				
C	56				
DNM	1" 1/4 G				
E	90				
H	334				
H2	70/5				

Pump connection

 Suction side : /
 Discharge side : 1" 1/4 G / --