

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

60141720

Model :

FEKA GL 1000 T-NA

Pump data

 Free passage : 46 mm
 Pressure rating :
 Min. fluid temperature : 32 °F
 Max. fluid temperature : 95 °F
 Max. Ambient temperature :

Requested data

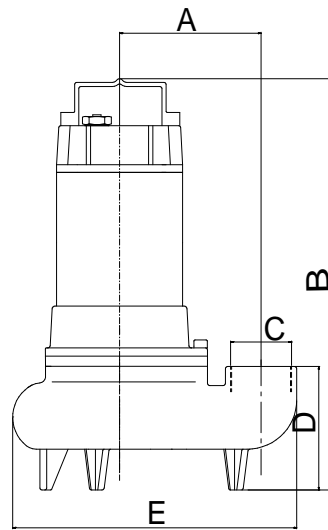
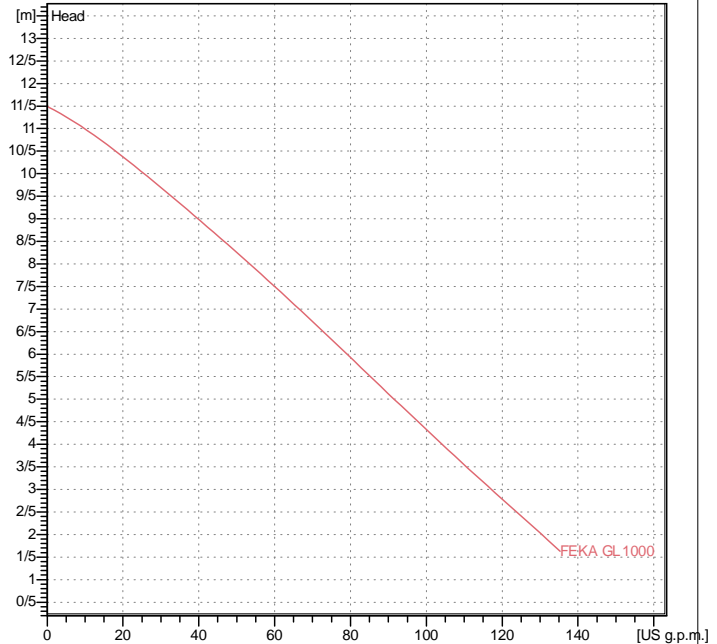
 Flow : 0 US g.p.m.
 Head : 0 m
 Fluid : Water, pure
 Fluid Temperature : 68 °F
 Density : 62/322 lb/ft³
 Kinematic viscosity : 1/0818E-5 ft²/s
 Vapor pressure : 2/337 kPa

Hydraulic data (duty point)

 Flow :
 Head :

Materials

 Top cover : Fiberglass reinforced nylon
 Impeller : Fiberglass reinforced nylon
 Pump body : Cast iron (EN GJL 200)
 Mechanical seal : SiC/SiC
 Motor shaft : Stainless Steel AISI 420
 Motor body : Cast iron (EN GJL 200)
 OR ring : NBR

Curve tolerance according to ISO 9906

Motor data
Weight : 19 kg

 Motor brand : DAB
 Nominal power P2 : 1/1 kW
 Rated speed : 2800 rpm
 Rated voltage : 3~ 400 V
 Nominal current : 3/5 A
 Degree of protection : IP 68

50 Hz

Dimensions in mm

Dimension	Value				
A	137				
B	412				
C	2" F				
D	120				
E	275				

Pump connection

 Suction side : /
 Discharge side : 2" F / --