

**Receiver**
**From**

 Society  
 Reference  
 Address  
 Phone  
 Fax  
 E-mail

**Item n° :**

60145469

**Model :**

FEKA GL 500 M-A

**Pump data**

Free passage : 30 mm

Pressure rating :

Min. fluid temperature : 32 °F

Max. fluid temperature : 95 °F

Max. Ambient temperature :

**Requested data**

Flow : 0 US g.p.m.

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 68 °F

Density : 62/322 lb/ft³

Kinematic viscosity : 1/0818E-5 ft²/s

Vapor pressure : 2/337 kPa

**Hydraulic data (duty point)**

Flow :

Head :

**Materials**

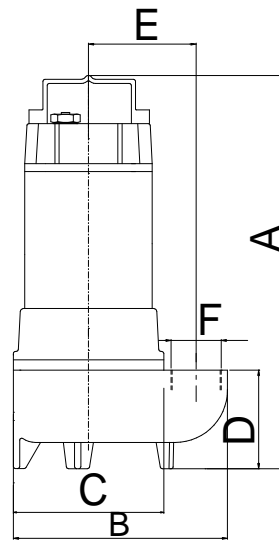
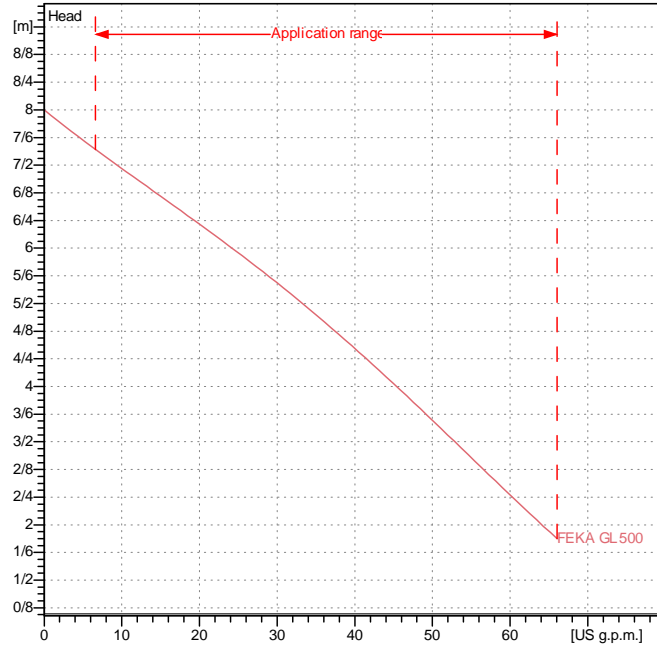
Top cover Technopolymer

Impeller Fiberglass reinforced nylon

Pump body Cast iron (EN GJL 200)

Mechanical seal Carbon/Alumina

Motor body Cast iron (EN GJL 200)

**Curve tolerance according to ISO 9906**

**Motor data**
**Weight :** 14 kg

Motor brand : DAB

Nominal power P2 : 0/4 kW

Rated speed : 2850 rpm

Rated voltage : 1~ 230 V

Nominal current : 2/9 A

Degree of protection : IP 68

50 Hz

**Dimensions in mm**

| Dimension | Value   |  |  |  |  |
|-----------|---------|--|--|--|--|
| A         | 390     |  |  |  |  |
| B         | 205     |  |  |  |  |
| C         | 144     |  |  |  |  |
| D         | 94      |  |  |  |  |
| E         | 103     |  |  |  |  |
| F         | 1"1/2 G |  |  |  |  |

**Pump connection**

 Suction side : /  
 Discharge side : 1" 1/2 G / --