

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

60145474

Model :

FEKA GL 650 T

Pump data

Free passage : 30 mm

Pressure rating :

Min. fluid temperature : 32 °F

Max. fluid temperature : 95 °F

Max. Ambient temperature :

Requested data

Flow : 0 US g.p.m.

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 68 °F

Density : 62/322 lb/ft³

Kinematic viscosity : 1/0818E-5 ft²/s

Vapor pressure : 2/337 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

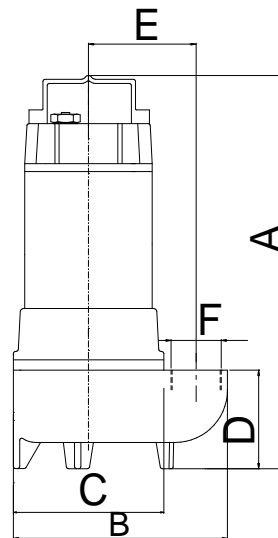
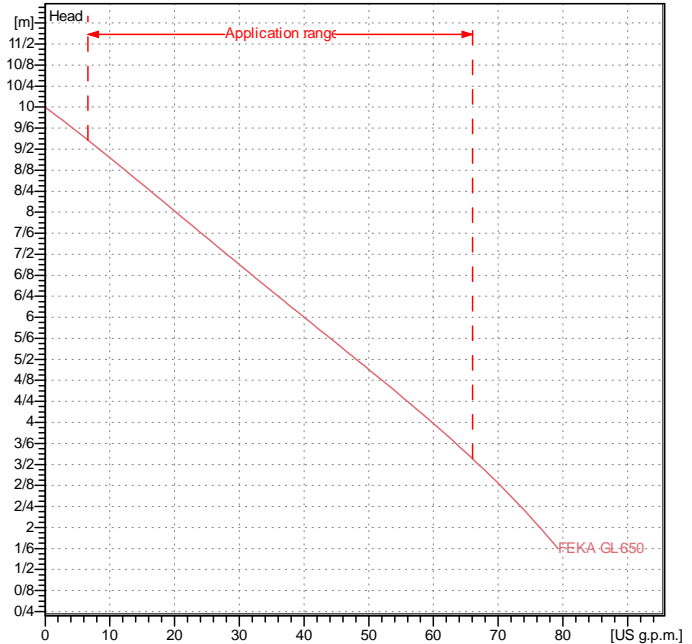
Top cover Technopolymer

Impeller Fiberglass reinforced nylon

Pump body Cast iron (EN GJL 200)

Mechanical seal Carbon/Alumina

Motor body Cast iron (EN GJL 200)

Curve tolerance according to ISO 9906

Motor data
Weight : 16 kg

Motor brand : DAB

Nominal power P2 : 0/55 kW

Rated speed : 2800 rpm

Rated voltage : 3~ 400 V

Nominal current : 1/4 A

Degree of protection : IP 68

50 Hz

Dimensions in mm

| Dimension | Value | | | | |
|-----------|---------|--|--|--|--|
| A | 390 | | | | |
| B | 205 | | | | |
| C | 144 | | | | |
| D | 94 | | | | |
| E | 103 | | | | |
| F | 1"1/2 G | | | | |

Pump connection

 Suction side : /
 Discharge side : 1" 1/2 G / --