

**Receiver**
**From**

 Society  
 Reference  
 Address  
 Phone  
 Fax  
 E-mail

**Item n° :**

60141717

**Model :**

FEKA GL 750 T-NA

**Pump data**

 Free passage : 46 mm  
 Pressure rating :  
 Min. fluid temperature : 32 °F  
 Max. fluid temperature : 95 °F  
 Max. Ambient temperature :

**Requested data**

 Flow : 0 US g.p.m.  
 Head : 0 m  
 Fluid : Water, pure  
 Fluid Temperature : 68 °F  
 Density : 62/322 lb/ft³  
 Kinematic viscosity : 1/0818E-5 ft²/s  
 Vapor pressure : 2/337 kPa

**Hydraulic data (duty point)**

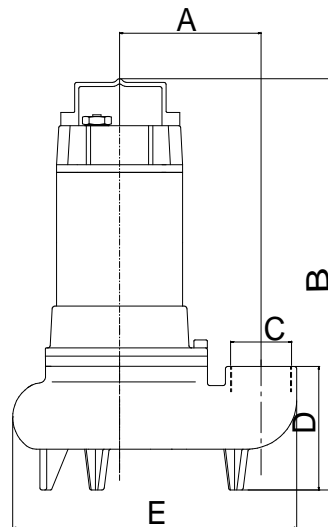
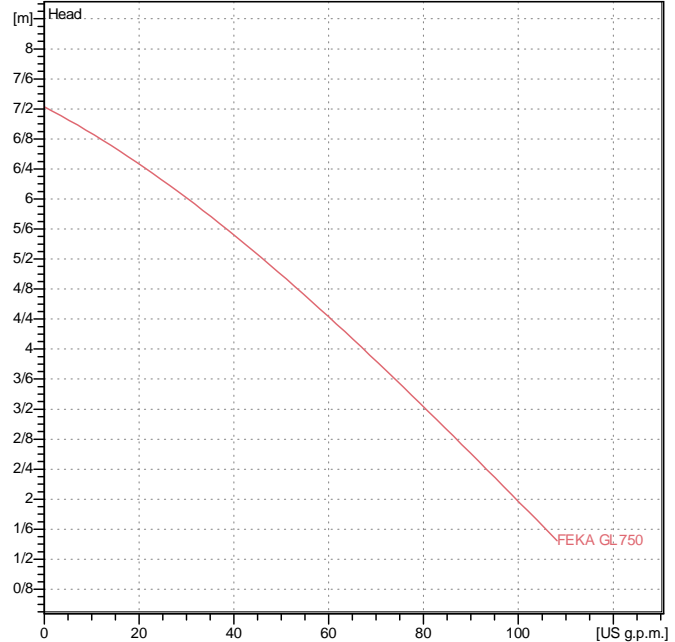
 Flow :  
 Head :

**Materials**

 Top cover : Fiberglass reinforced nylon  
 Impeller : Fiberglass reinforced nylon  
 Pump body : Cast iron (EN GJL 200)  
 Mechanical seal : SiC/SiC  
 Motor shaft : Stainless Steel AISI 420  
 Motor body : Cast iron (EN GJL 200)  
 OR ring : NBR

**Motor data**

 Motor brand : DAB  
 Nominal power P2 : 0/6 kW  
 Rated speed : 2800 rpm  
 Rated voltage : 3~ 400 V  
 Nominal current : 1/5 A  
 Degree of protection : IP 68  
 50 Hz

**Curve tolerance according to ISO 9906**

**Weight :** 18 kg

**Dimensions in mm**

Dimension	Value	Unit
A	137	mm
B	412	mm
C	2"	F
D	120	mm
E	275	mm

**Pump connection**

 Suction side : /  
 Discharge side : 2" F / --