

**Receiver**
**From**

 Society  
 Reference  
 Address  
 Phone  
 Fax  
 E-mail

**Item n° :**  
 60176873  
**Model :**  
 FKC 100 30.4 T5 400D

**Pump data**

 Type of impeller : Single channel impeller  
 Pump outlet : DN 100  
 Pump inlet : DN 100  
 Flange standard : EN 1092-1 / PN 16  
 Free passage : 100 mm  
 Fluid Temperature : 32 °F / 104 °F\*  
 \* For higher temperatures please contact our sales network  
 pH : 6,5 - 12  
 Kinematic viscosity : 1/0764E-5 ft<sup>2</sup>/s  
 Max Flow : 744/08 US g.p.m.  
 Max. Head : 9/323 m  
 Max. Hydraulic efficiency : 57/1 %

**Approvals**

 Approvals : 12050-1  
 ATEX : NO

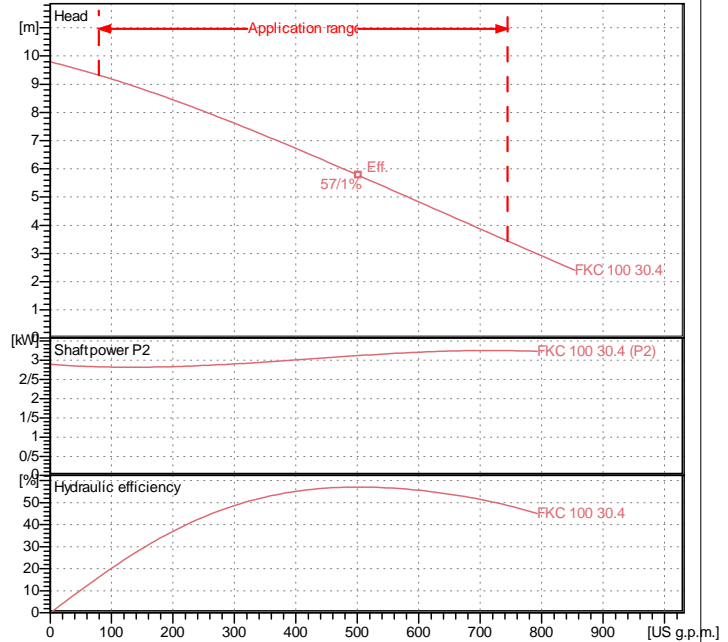
**INSTALLATION**

 Max. Ambient temperature : 104 °F  
 Max. installation depth : 20 m  
 Type of installation :  
Wet - Pump only.
**Materials**

 Handle : Stainless Steel (AISI 304)  
 Electric cable : 07RN8-F  
 Screws : Stainless Steel (AISI 304)  
 OR : NBR  
 Mechanical seal pump side : SiC/SiC  
 Mechanical seal motor side : SiC/Carbon  
 Seal ring : HNBR  
 Motor shaft : AISI 420  
 Pump body / motor : Cast iron (EN GJL 200)  
 Impeller : Cast iron (EN GJL 250)  
 Wear ring : Cast iron (EN GJL 150)  
 Coating : Acrylic Two-component 50µm

**Motor data**

 Number of poles : 4  
 Max. Input power P1 : 3/41 kW  
**Nominal power P2 :** 3 kW  
 Rated voltage : 3~ 400 V (+6% / -10%) 50 Hz  
 Nominal current : 7/7 A  
 Starting current (DOL / YD) : 24/7 A / —  
 Starting : Directly  
 Rated speed : 1450 rpm  
 Efficiency : 88 %  
 Number of starts : 20 /h  
 Degree of protection : IP 68  
 Insulation class : F 302 °F  
 Standard cable type : 10mt 4G1.5+3x1  
 Water-in-oil sensor : NO  
 Motor protection : Thermal switch

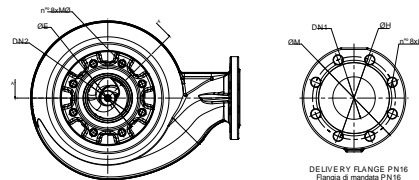

**Curve tolerance according to ISO 9906**

**Fluid data**

 Fluid : Water, pure Fluid Temperature : 68 °F  
 Density : 62/322 lb/ft<sup>3</sup> Kinematic viscosity : 1/0818E-5 ft<sup>2</sup>/s

**Requested data**

 Flow : 0 US g.p.m.  
 Head : 0 m

**Real duty point**

 Flow :  
 Head :

**Pump weight :** 170 kg

**Accessory weight :** 0 kg

**Dimensions in mm**

|    |     |     |     |  |  |
|----|-----|-----|-----|--|--|
| ?C | 430 | DN1 | 100 |  |  |
| ?E | 240 | DN2 | 150 |  |  |
| ?H | 180 | M?  | M20 |  |  |
| ?M | 224 | S1  | 558 |  |  |
| ?Y | 18  | S3  | 220 |  |  |
| A  | 758 |     |     |  |  |
| B  | 544 |     |     |  |  |
| D  | 116 |     |     |  |  |