

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

60176852

Model :

FKC 150 55.4 T5 400Y/D

Pump data

Type of impeller : Single channel impeller
 Pump outlet : DN 150
 Pump inlet : DN 150
 Flange standard : EN 1092-1 / PN 16
 Free passage : 100 mm
 Fluid Temperature : 32 °F / 104 °F*

* For higher temperatures please contact our sales network

pH : 6,5 - 12
 Kinematic viscosity : 1/0764E-5 ft²/s
 Max Flow : 1250/4 US g.p.m.
 Max. Head : 15/79 m
 Max. Hydraulic efficiency : 71/6 %

Approvals

Approvals : 12050-1
 ATEX : NO

INSTALLATION


Max. Ambient temperature : 104 °F
 Max. installation depth : 20 m
 Type of installation :
 Wet - Pump only..

Materials

Handle : Stainless Steel (AISI 304)
 Electric cable : 07RN8-F
 Screws : Stainless Steel (AISI 304)
 OR : NBR
 Mechanical seal pump side : SiC/SiC
 Mechanical seal motor side : SiC/Carbon
 Seal ring : HNBR
 Motor shaft : AISI 420
 Pump body / motor : Cast iron (EN GJL 200)
 Impeller : Cast iron (EN GJL 250)
 Wear ring : Cast iron (EN GJL 150)
 Coating : Acrylic Two-component 50µm

Motor data

Number of poles : 4
 Max. Input power P1 : 6/06 kW
 Nominal power P2 : 5/5 kW
 Rated voltage : 3~ 400 V (+6% / -10%) 50 Hz
 Nominal current : 11/3 A
 Starting current (DOL / YD) : 50/3 A / —
 Starting : Star-delta
 Rated speed : 1450 rpm
 Efficiency : 90/7 %
 Number of starts : 20 /h
 Degree of protection : IP 68
 Insulation class : F 302 °F
 Standard cable type : 10mt 7G2.5+3x1
 Water-in-oil sensor : NO
 Motor protection : Thermal switch

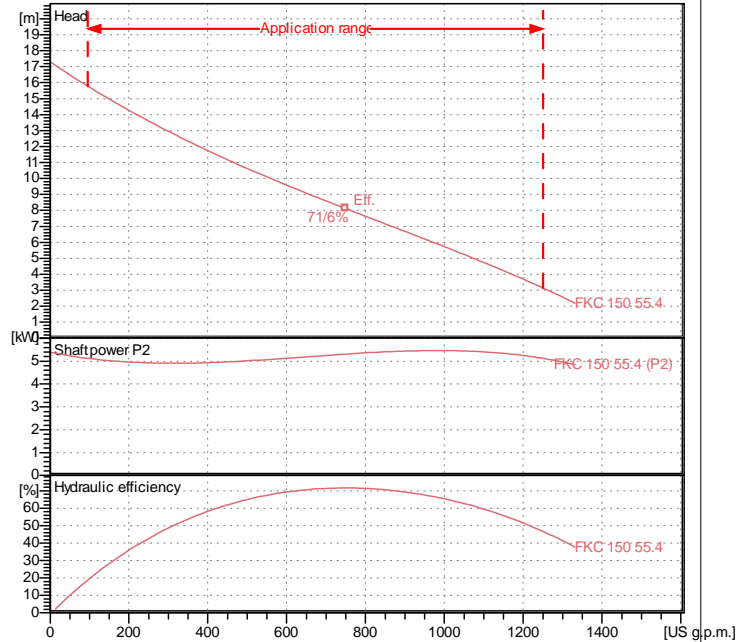Curve tolerance according to ISO 9906

Fluid data



Fluid : Water, pure Fluid Temperature : 68 °F
 Density : 62/322 lb/ft³ Kinematic viscosity : 1/0818E-5 ft²/s

Requested data

Flow : 0 US g.p.m.
 Head : 0 m

Real duty point

Flow :
 Head :



Pump weight : 223 kg

Accessory weight : 0 kg

Dimensions in mm

?C	460	DN1	150
?E	240	DN2	150
?H	240	M?	M20
?M	285	S1	660
?Y	22	S3	250
A	870		
B	540		
D	110		