

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

103045060

Model :

FEKA VX 750 T - NA

Pump data

 Free passage : 50 mm
 Pressure rating :
 Min. fluid temperature : 0
 Max. fluid temperature : 122 °F
 Max. Ambient temperature : 104 °F

Requested data

 Flow : 0 US g.p.m.
 Head : 0 m
 Fluid : Water, pure
 Fluid Temperature : 68 °F
 Density : 62/322 lb/ft³
 Kinematic viscosity : 1/0818E-5 ft²/s
 Vapor pressure : 2/337 kPa

Hydraulic data (duty point)

 Flow :
 Head :

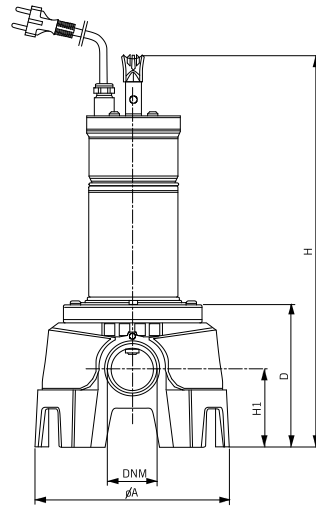
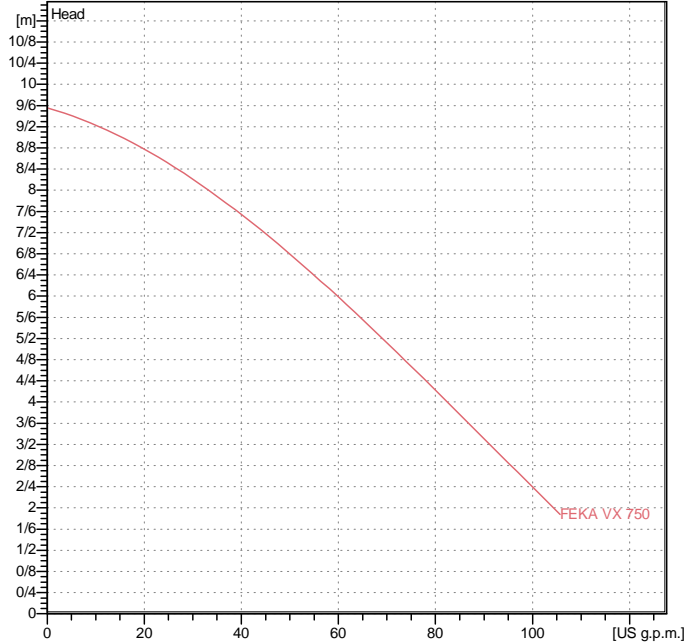
Materials

 Pump body Technopolymer
 Impeller Technopolymer
 Motor shaft AISI 316
 Seal disk Stainless Steel (AISI 304)
 Motor casing Stainless Steel (AISI 304)
 Protection cover Stainless Steel (AISI 304)
 Mechanical seal pump side Silicon carbide/Silicon carbide

Motor data

 Motor brand : DAB
 Nominal power P2 : 0/75 kW
 Rated speed : 2800 rpm
 Rated voltage : 3~ 400 V
 Nominal current : 1/94 A
 Degree of protection : IP 68

50 Hz

Curve tolerance according to ISO 9906

Weight : 17/9 kg

Dimensions in mm

Dimension	Value				
A	245				
D	179				
DNM	2" F				
H	498				
H1	98				

Pump connection

 Suction side : /
 Discharge side : 2" F / --