

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

60141690

Model :

DIG 1500 T-NA

Pump data

 Free passage : 6 mm
 Min. fluid temperature : 32 °F
 Max. fluid temperature : 95 °F

Requested data

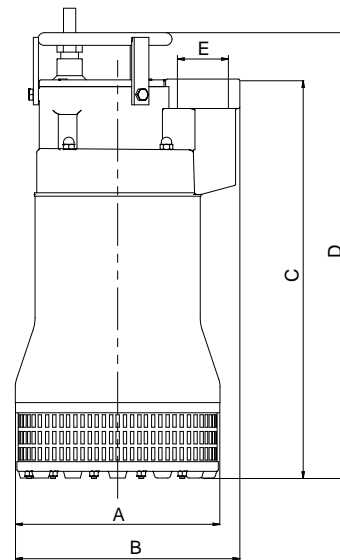
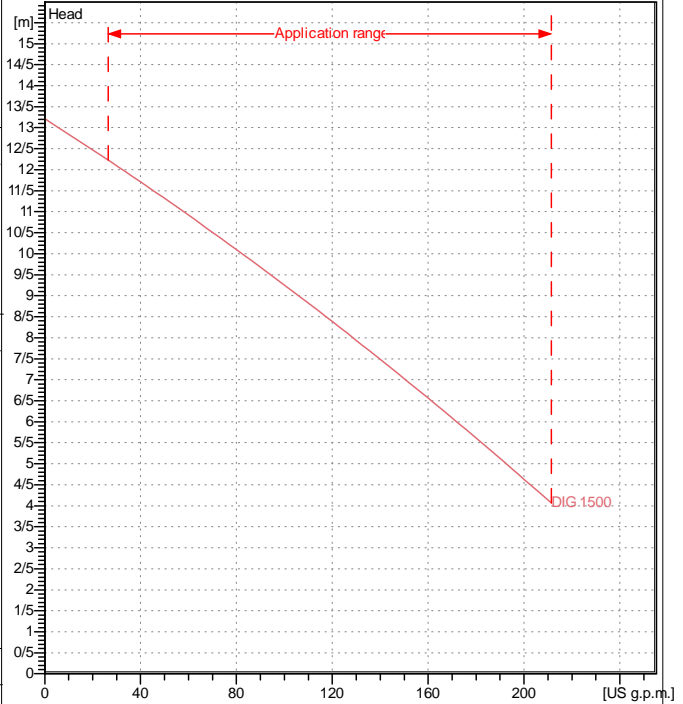
 Flow :
 Head :
 Fluid : Water, pure
 Fluid Temperature : 68 °F
 Density : 62/322 lb/ft³
 Kinematic viscosity : 1/0818E-5 ft²/s
 Vapor pressure : 2/337 kPa

Hydraulic data (duty point)

 Flow : 0 US g.p.m.
 Head : 0 m

Materials

 Power supply cable 07RN8-F
 Handle FE chrome plated
 External sleeve Stainless Steel AISI 304
 Rotor shaft AISI 420
 Cover Cast iron (EN GJL 200)
 OR NBR
 Motor body Stainless Steel (AISI 304)
 Bearing flange Cast iron (EN GJL 200)
 Mechanical seal motor side Carbon/Alumina
 Mechanical seal pump side Silicon carbide/Silicon carbide
 Impeller AISI ASTM 532-80
 Pump body Anti-abrasive rubber 70SHORE
 Suction strainer Stainless Steel AISI 304

Curve tolerance according to ISO 9906

Motor data

 Nominal power P2 : 1/5 kW
 Rated speed : 2800 rpm
 Rated voltage : 3~ 400 V 50 Hz
 Nominal current : 4/3 A
 Degree of protection : IP 68

Dimensions in mm

A	250	E	2" 1/2 F
B	270		
C	480		
D	530		

 Suction side : /
 Discharge side : 2" 1/2 / --
 Weight : 35 kg