	Product Information	Manufacturer	CNP
	Product information	Address	Yuhang District, Hangzhou, Zhejiang,
COND	150WQ150-35-37(I)	Contact	86-571-88637351
		Date	2022/03/09
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
Item NO		Contact	

Part NO.	150WQ150-35-37(I)	
Product Picture		Note
		The sewage submersible pump is composed of two parts: the motor and the pump. The two are separated by an oil chamber and a mechanical seal assembly. Divided into fixed automatic coupling installation and mobile installation
technology		
Pump rotator speed	1470	

Material

Nameplate standards

ImpellerHT200Pump shaft20cr13Rubber codePPump caseHT200

CE

Installation

Connection Code F

Maximum Pressure/Temperatu 6bar/40

Flange Standard DIN

Pressure Class PN6

Medium

Medium Temperature 40
Maximum diameter of partic 65
Maximum Environment Temper 40

Structure dimension

Standard caliber DN
Outlet Diameter DN150

Motor

Number of Motor Phase Three Phase
Protection Class IP68
Insulation Class F
Motor Power 37
Power Frequency 50HZ
Rated Voltage (V) 380V
Rated Current (A) 71.9

Starting mode Star delta boot


Seal

Mechanical Seal H-60

Others

Weight (kg) 700


	Performance Curve 150WQ150-35-37(I)		CNP
			Yuhang District, Hangzhou, Zhejiang,
COND			86-571-88637351
CINI	13044(130-33-37(1)	Date	2022/03/09
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
ILEIII NO		Contact	

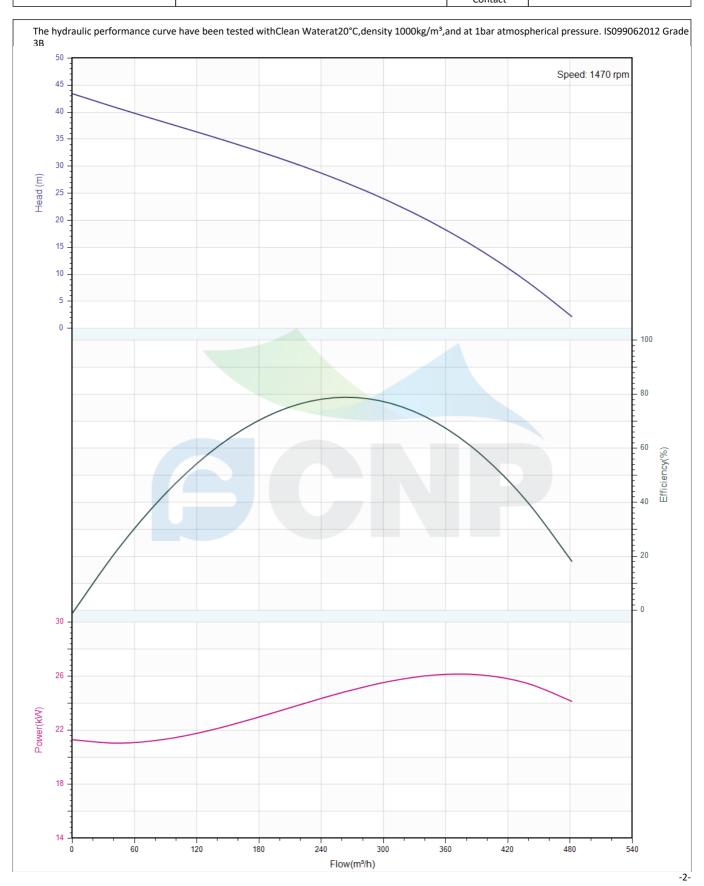


	Pump Technical Parameters		CNP
	rump recimical rarameters	Address	Yuhang District, Hangzhou, Zhejiang,
COND	150WQ150-35-37(I)	Contact	86-571-88637351
	13044(130-33-37(1)	Date	2022/03/09
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
ILEIII NO		Contact	

Rated parameters					
Pump model	150WQ150-35-37(I)				
Part NO.	150WQ150-35-37(I)				
Rated flow (m³/h)	150				
Rated head (m)	35				
Rated efficiency (%)	49.5				
Power (kW)	27.506				
Speed (rpm)	1470				

Medium		
Pumped medium	Clean Water	
Working temperature (°C)	20	
Medium density (kg/m³)	1000	
Viscosity (mm²/s)	1	

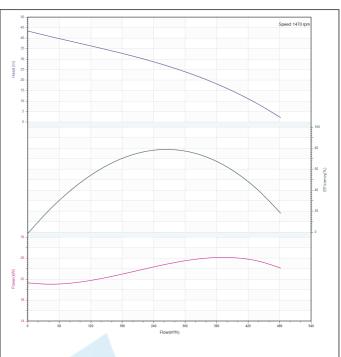






CNP Nanfang Zhongjin Environment Co., Ltd.

SECTIONAL DRAWING	No.	No.
TYPE submersible sewage pump	MODEL	30/37KW

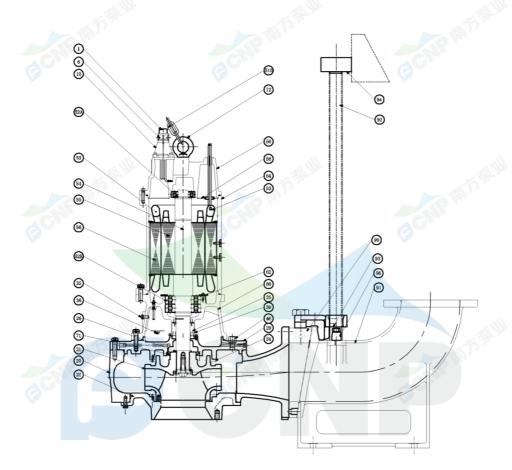

order	specifications

No.	names of parts	number	material	No.	names of parts	number	material
1	cable	2	YCW	54	shaft	1	
6	cable sleeve	2	HT200	55	rotor	1	
50	top cover	1	HT200	56	stator	1	
58	cable transit board	1	Q235	52B	lower bearing	2	
64	base	1	HT200	36	machine oil 32#		
62	Bearing cover	1	HT200	26	framework oil seal	3	NBRI-2
25	mechanical seal	1	Carbon/SIC	35	oil filler plug	2	SUS304
30	oil lift	1		71	Shaft sleeve	2	1Cr13
60	lower cover	1	HT200	21	impeller	1	HT200
29	Casingtop cover	1	HT200	22	water inlet cover	1	HT200
20	casing	1	HT200	34	Neck ring	2	HT200
510	lift chain	1	SUS304	94	guiding	1	QT400
10	Cable lockblock	2	HT200	92	pipe	2	SUS304(unaffiliated
72	eye bolt	2	45#(forging galvanized)	93	guide hook	1	QT500
52A	upper bearing	1		91	Discharge base	1	HT200
53	Mini-thermalprotector	1		99	Flange for coupling device	1	HT200
				96	Guiding fixing stopper	2	HT200

Nanfang Zhongjin Environment CO., LTD.

	Installation picture	Manufacturer	CNP
	ilistaliation picture	Address	Yuhang District, Hangzhou, Zhejiang,
COND	150WQ150-35-37(I)	Contact	86-571-88637351
	13044(130-33-37(1)	Date	2022/03/09
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
Itelli NO		Contact	

