A	Product Information	Manufacturer	CNP
	i roddet iiiioiiiidtioii	Address	Yuhang District, Hangzhou, Zhejiang,
ACND	CDLK8-120/12	Contact	86-571-88637351
D OITH	CDLK0-12U/12	Date	2022/07/25
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Part NO.	1100056587	
Product Picture		Note
		Product introduction CDLK/CDLKF is non-self priming multi-stage centrifugal pump installed with standard motor. The motor shaft is directly connected with the pump shaft through coupling. The impellers and diffusers are made of stainless steel plate stamping and welding. In order to meet the requirement of installation depth of the water tank or vessel, it is possible to install cavity diffusers for changing length of the pump. Performance and advantages Compact structure Convenient maintenance Changeable installation depth

Nameplate parameters

flow 8 m³/h
head 111 m
Efficiency 58
speed 2900
number of stages 12

technology

Pump rotator speed 2900 Nameplate standards CE

Material

Impeller304Rubber codePMaterial CodeS

Medium

Medium Temperature normal -15°C+70°C

Medium Temperature high t -15°C+105°C

Maximum Environment Temper 40°C

Three Phase

Motor

Number of Motor Phase

Protection Class IP55
Insulation Class F
Motor Power 4.0KWKW
Power Frequency 50HZ
Rated Voltage (V) 380V
Rated Current (A) 8.0A
Energy Efficiency Level IE3


Seal

Mechanical Seal CDL-16/WSF14

Others

Weight (kg) 54


	Performance Curve	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
CONP	CDLK8-120/12	Contact	86-571-88637351
DOI VI	CDLR0-12U/12	Date	2022/07/25
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

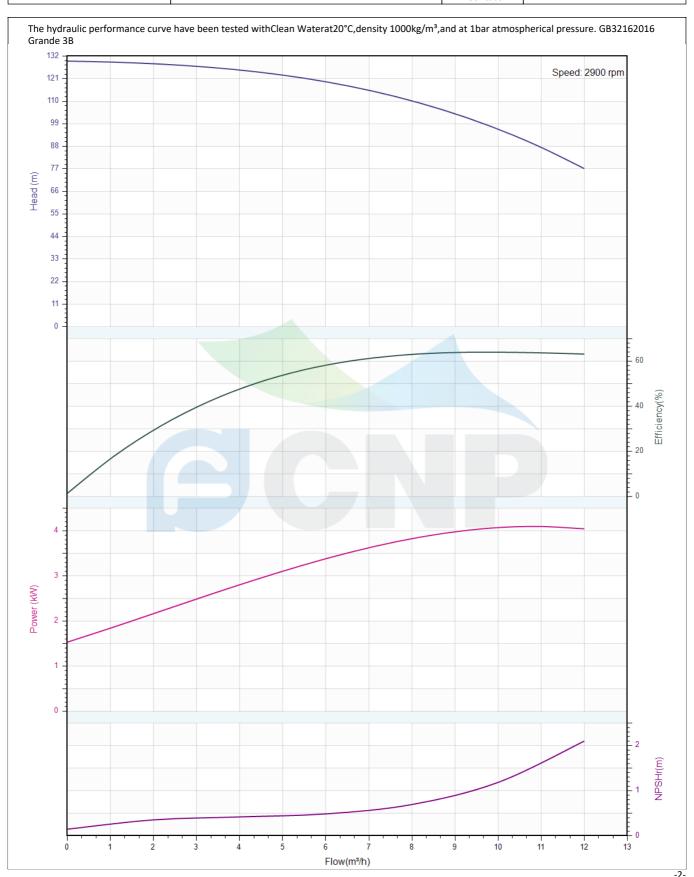

	Pump Technical Parameters	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
CCNP	CDLK8-120/12	Contact	86-571-88637351
M Oldi	CDLR0-12U/12	Date	2022/07/25
Project Name		Client Name	DPA
		Client Addr.	
Item NO	_	Contacts	Alireza
		Contact	

Rated parameters			
Pump model	CDLK8-120/12		
Part NO.	1100056587		
Rated flow	8 m³/h		
Rated head	111 m		
Rated efficiency (%)	58		
Power (kW)	4.17		
NPSHr (m)	2		
Speed (rpm)	2900		
Max impeller diameter (mm)	96.5		
	· · · · · · · · · · · · · · · · · · ·		

Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1
_	

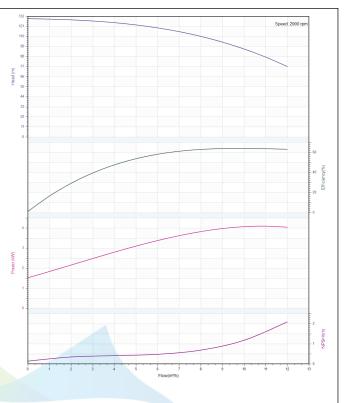



	A Physical picture	Manufacturer	CNP
	i ilysical picture	Address	Yuhang District, Hangzhou, Zhejiang,
CONP	CDLK8-120/12	Contact	86-571-88637351
M Oldi	CDLR0-12U/12	Date	2022/07/25
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

