	Product Information CDM15-3	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/07/26
Project Name		Client Name	DPA
Item NO		Client Addr.	
		Contacts	Alireza
		Contact	

Part NO.	1100090762
----------	------------

Product Picture	Note
	<p>CDM/CDMF pumps are new generation, high efficiency, non-self-priming vertical multistage centrifugal pumps (Abbr. as pumps). It referred to European standard, adopted entirely new industrial design, efficiency achieved $MEI \geq 0.7$. It is energy saving, low noise, environment friendly, compact design, beautiful shape, light weight, easy for service, high reliability.</p>

Nameplate parameters

flow	15 m ³ /h
head	34.5 m
Efficiency	71
speed	2900
number of stages	3

technology

Pump rotator speed	2900
Nameplate standards	CE
Pump version	2

Material

Impeller	304
Rubber code	P
Inlet&outlet chamber	304
Material Code	S

Installation


Connection Code	F
Maximum Pressure/Temperatu	22 bar/120 °C
Maximum Pressure/Temperatu	22 bar/-15 °C
Flange Standard	DIN
Pressure Class	PN25
Inlet & outlet	DN50

Medium

Medium Temperature normal	-15°C+70°C
Medium Temperature high t	-15°C+120°C
Maximum Environment Temper	40°C

Motor

Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power	3KW
Power Frequency	50Hz
Rated Voltage (V)	220/380V
Rated Current (A)	10.4/6.0A
Energy Efficiency Level	IE3

	Product Information CDM15-3	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/07/26
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Seal

Mechanical Seal CDLA-16/WBF14

Others

Weight (kg) 52





Performance Curve


CDM15-3

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/07/26
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name

Item NO

The hydraulic performance curve have been tested with Clean Water at 20°C, density 1000kg/m³, and at 1bar atmospheric pressure. GB32162016 Grande 3B

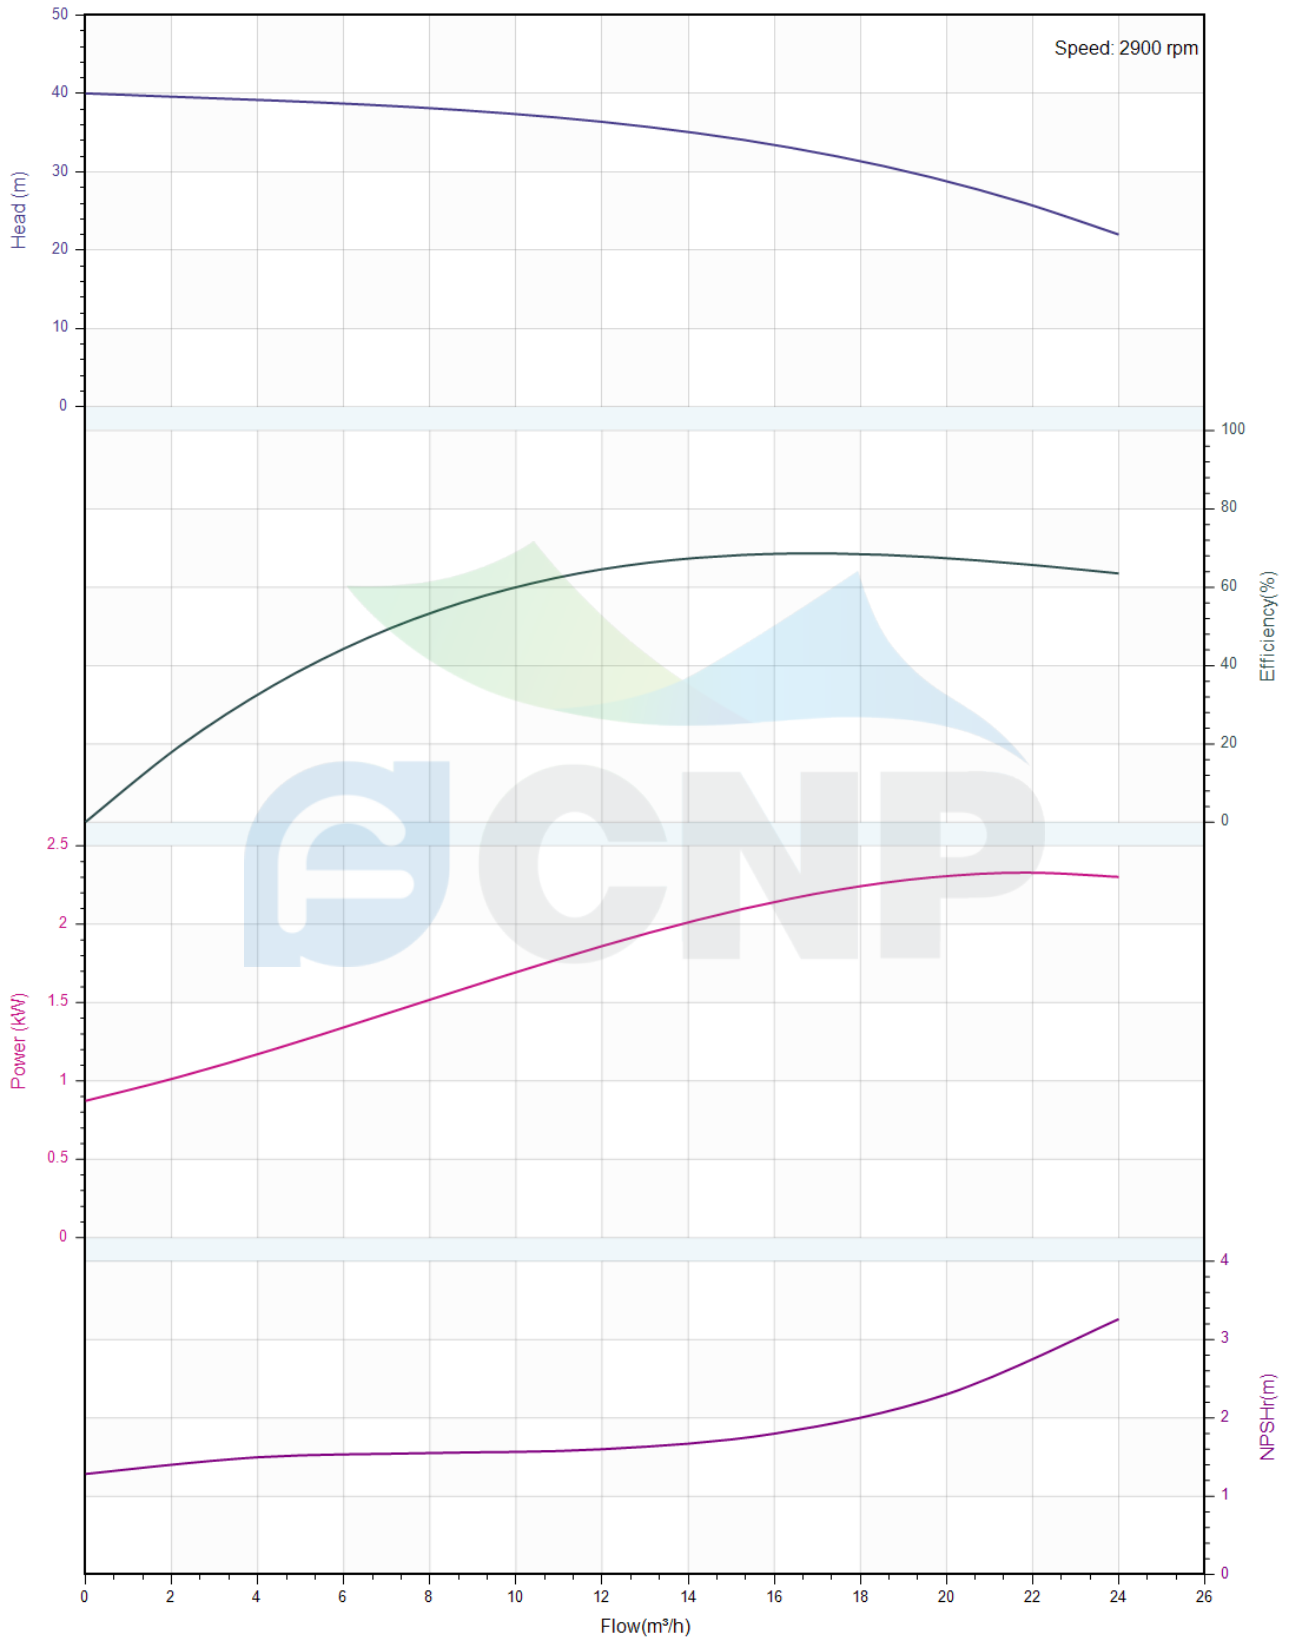



Pump Technical Parameters

CDM15-3


Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/07/26
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Rated parameters

Pump model	CDM15-3
Part NO.	1100090762
Rated flow	15 m ³ /h
Rated head	34.5 m
Rated efficiency (%)	71
Power (kW)	1.99
NPSHr (m)	1.8
Speed (rpm)	2900
Max impeller diameter (mm)	105

Medium

Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m ³)	1000
Viscosity (mm ² /s)	1

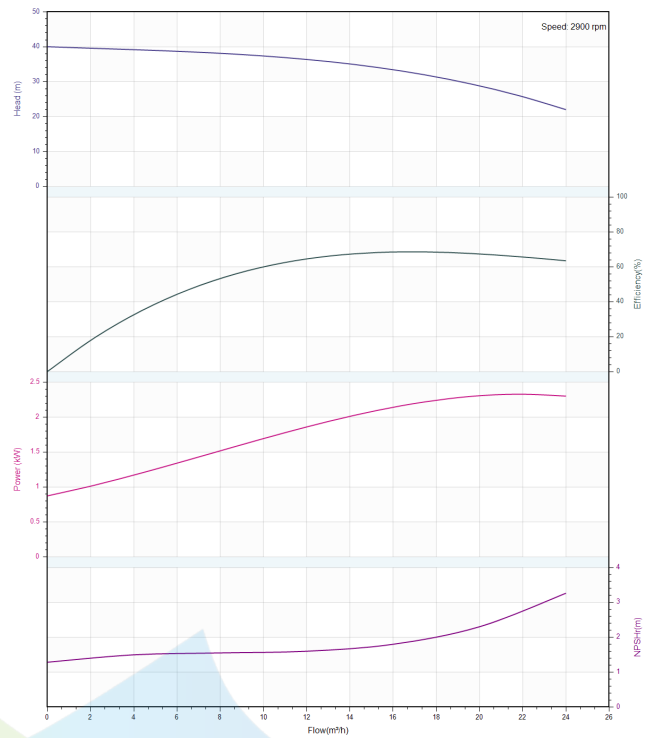




Structure picture
CDM15-3

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/07/26
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name

Item NO

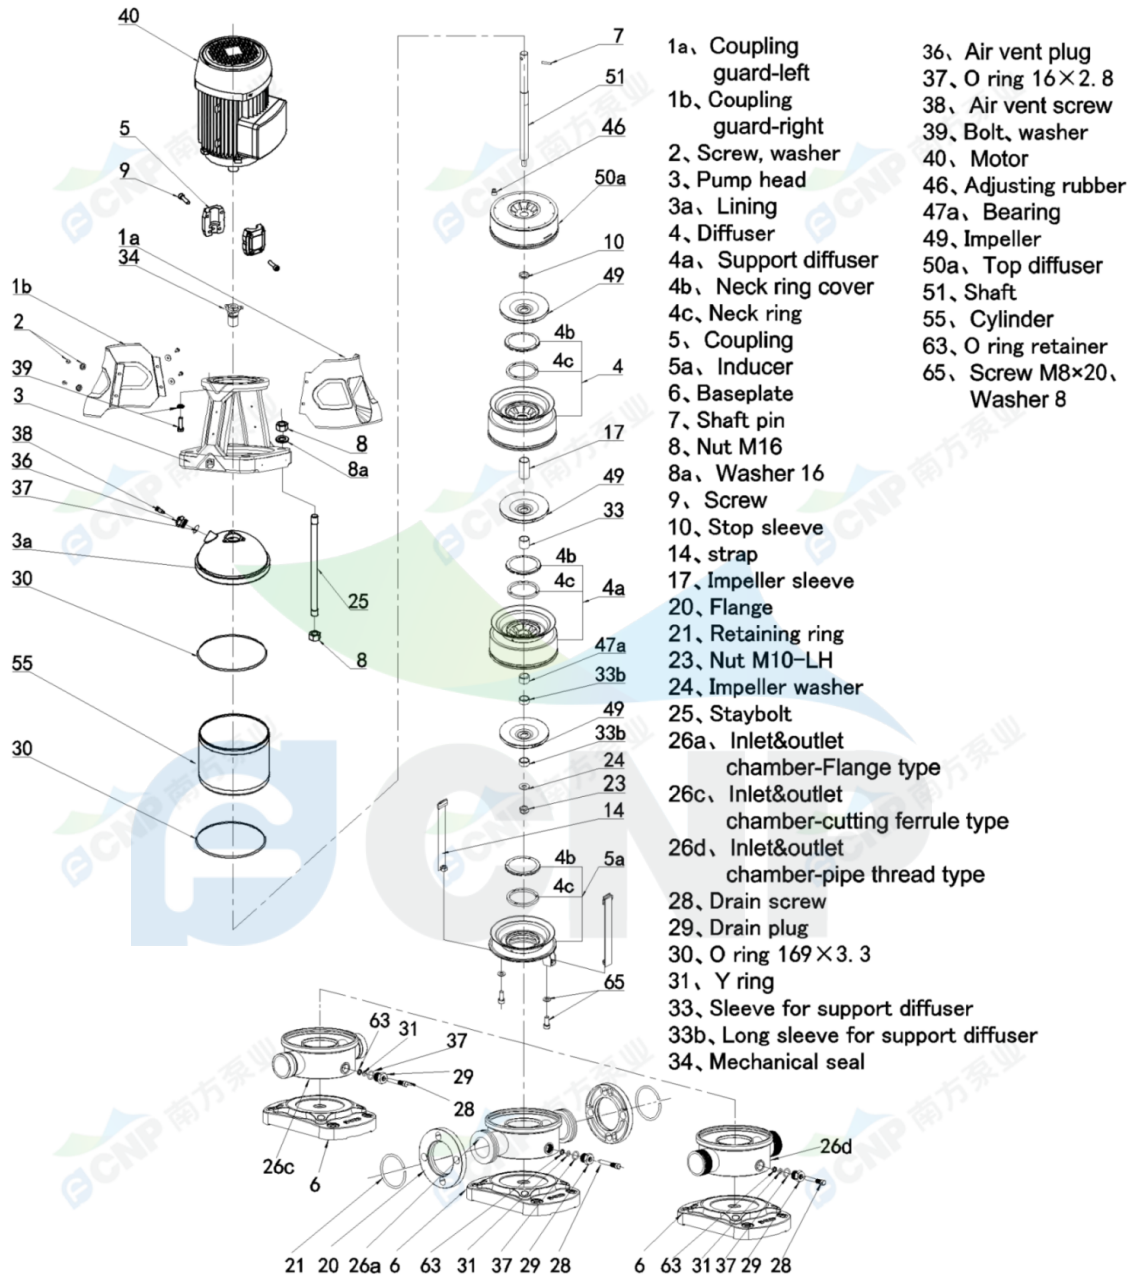

- 1a、Coupling guard-left
- 1b、Coupling guard-right
- 2、Screw, washer
- 3、Pump head
- 3a、Lining
- 4、Diffuser
- 4a、Support diffuser
- 4b、Neck ring cover
- 4c、Neck ring
- 5、Coupling
- 5a、Inducer
- 6、Baseplate
- 7、Shaft pin
- 8、Nut M16
- 8a、Washer 16
- 9、Screw
- 10、Stop sleeve
- 14、strap
- 17、Impeller sleeve
- 20、Flange
- 21、Retaining ring
- 23、Nut M10-LH
- 24、Impeller washer
- 25、Staybolt
- 26a、Inlet&outlet chamber-Flange type
- 26b、Inlet&outlet chamber-cutting ferrule type
- 26c、Inlet&outlet chamber-cutting ferrule type
- 26d、Inlet&outlet chamber-pipe thread type
- 28、Drain screw
- 29、Drain plug
- 30、O ring 169×3. 3
- 31、Y ring
- 33、Sleeve for support diffuser
- 33b、Long sleeve for support diffuser
- 34、Mechanical seal
- 36、Air vent plug
- 37、O ring 16×2. 8
- 38、Air vent screw
- 39、Bolt, washer
- 40、Motor
- 46、Adjusting rubber
- 47a、Bearing
- 49、Impeller
- 50a、Top diffuser
- 51、Shaft
- 55、Cylinder
- 63、O ring retainer
- 65、Screw M8×20、Washer 8



Physical picture
CDM15-3

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/07/26
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name

Item NO

