
	Product Information CHM2-6	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
Project Name		Contact	86-571-88637351
		Date	2022/03/07
		Client Name	DPA
Item NO		Client Addr.	
		Contacts	Alireza
		Contact	

Part NO.	1100070124
----------	------------

Product Picture	Note
	<p>Non-self-priming horizontal multistage centrifugal pump. The impeller guide vane is made of stainless steel plate stamping and welding. Equipped with long shaft motor, axial inlet and radial outlet.</p>

technology	
Pump rotator speed	2900
Material	
Impeller	304
Rubber code	F
Material Code	S
Installation	
Connection Code	L
Installation type	horizontal
Maximum Operation Pressure	10Bar
Medium	
Medium Temperature normal	-15+70
Medium Temperature high t	-15+105
Maximum Environment Temper	40
Structure dimension	
Inlet & outlet size types	G
Inlet & Outlet Diameter	G1/G1
Rotation Direction	Clockwise
Motor	
Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power	0.75
Energy Efficiency Level	IE2
Seal	
Mechanical Seal	CHM-14/SB1F4
Others	
Weight (kg)	17




Performance Curve CHM2-6

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/03/07
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name

Item NO

The hydraulic performance curve have been tested with Clean Water at 20°C, density 1000kg/m³, and at 1bar atmospheric pressure. ISO99062012 Grade 3B

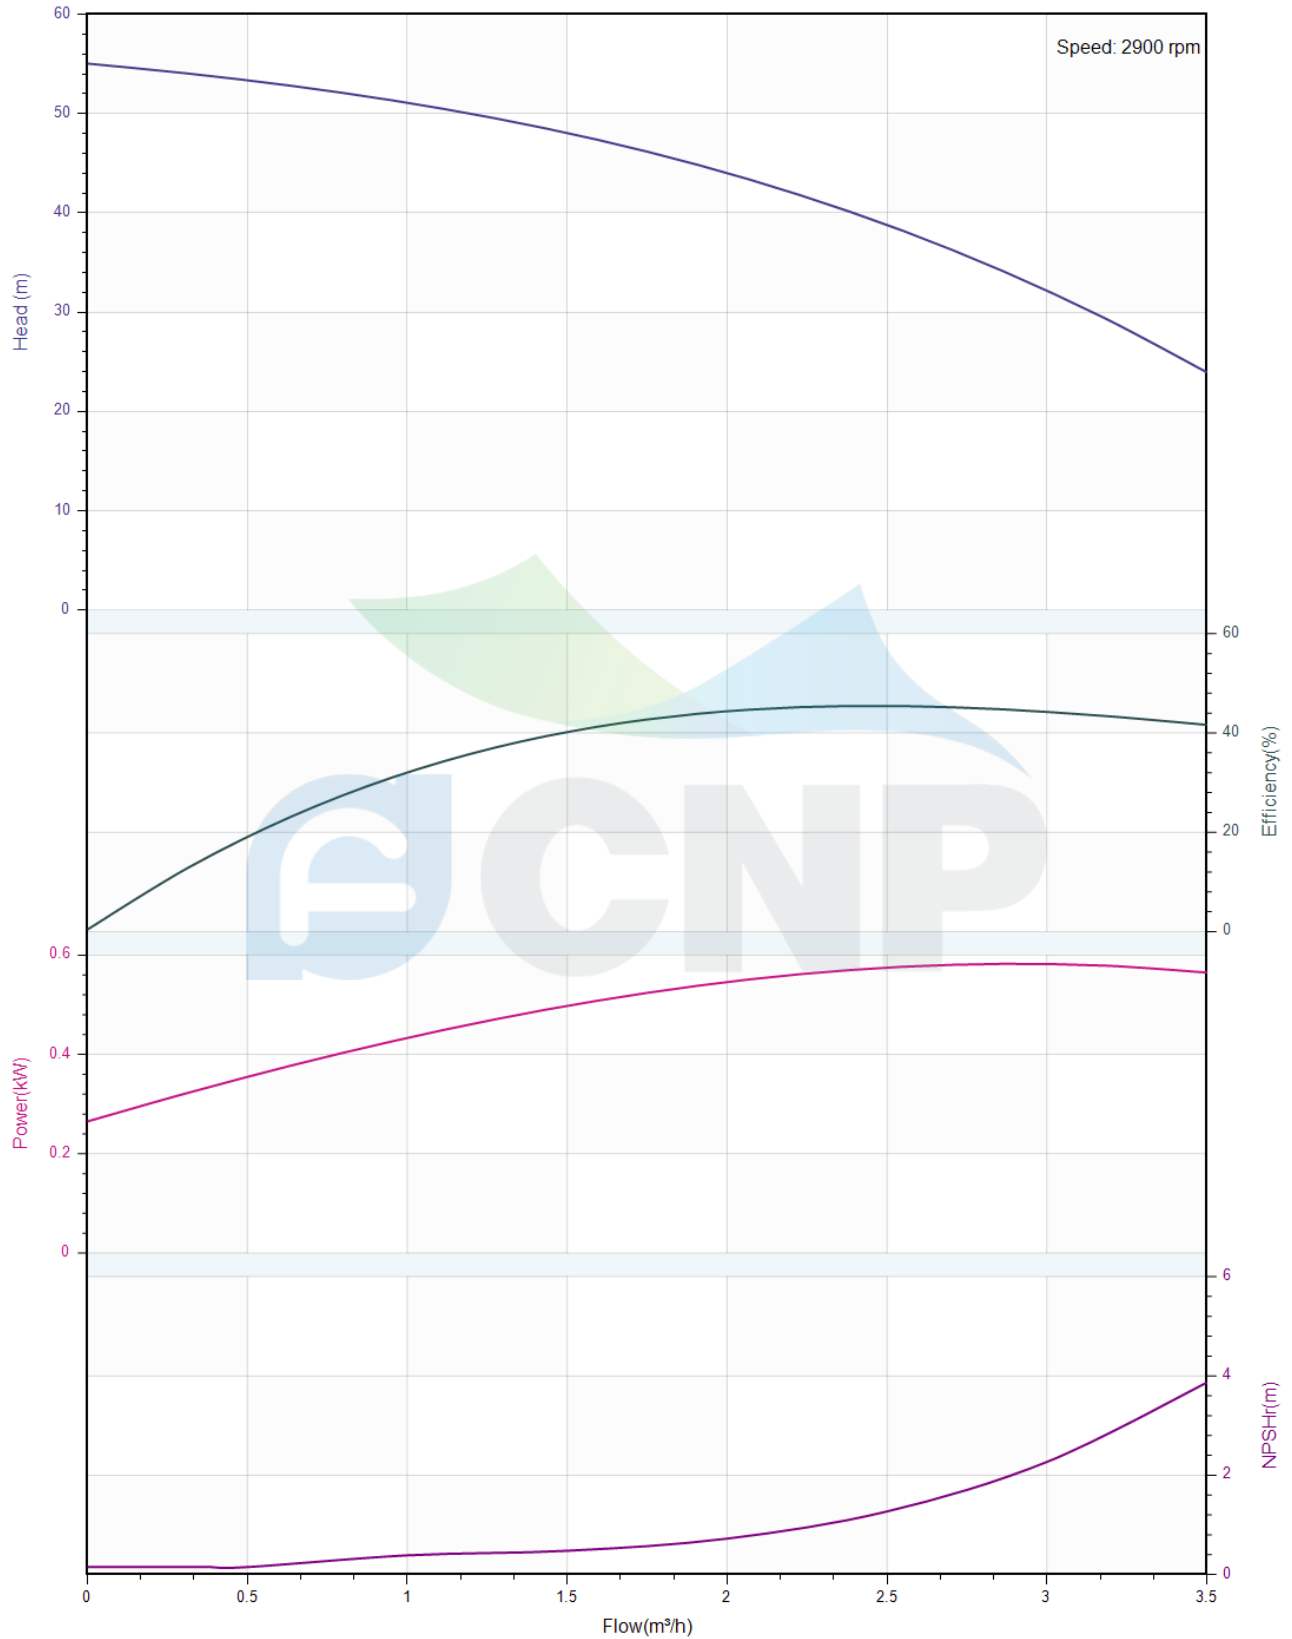



Pump Technical Parameters CHM2-6


Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/03/07
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Rated parameters

Pump model	CHM2-6
Part NO.	1100070124
Rated flow (m ³ /h)	2
Rated head (m)	44
Rated efficiency (%)	41
Power (kW)	0.585
NPSHr (m)	2
Speed (rpm)	2900
Max impeller diameter (mm)	90

Medium

Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m ³)	1000
Viscosity (mm ² /s)	1

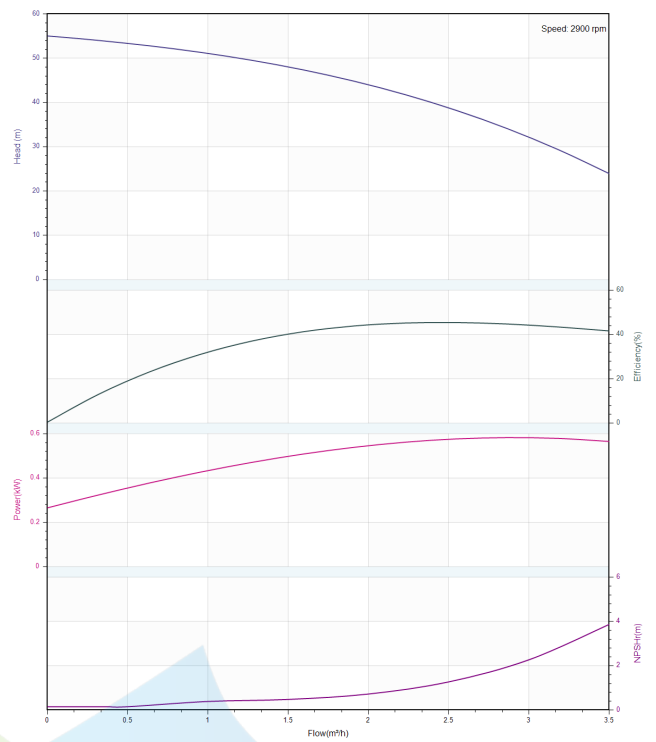




Structure picture
CHM2-6

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/03/07
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name

Item NO

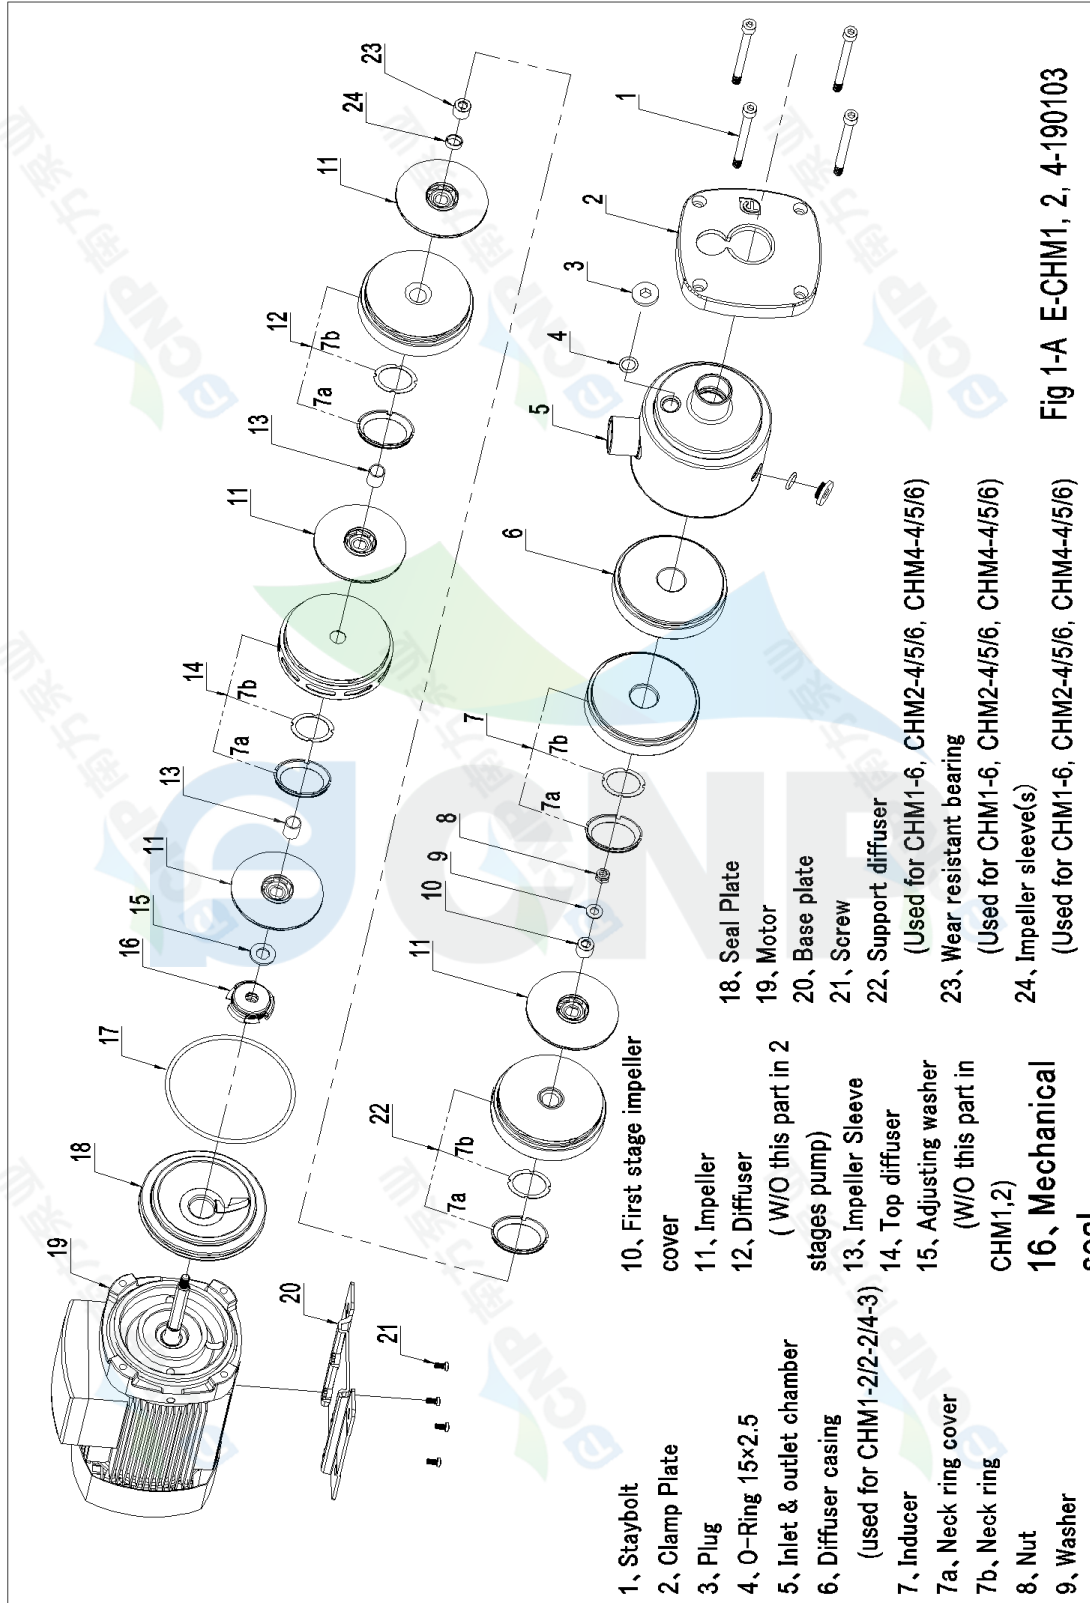

- 1, Staybolt
- 2, Clamp Plate
- 3, Plug
- 4, O-Ring 15x2.5
- 5, Inlet & outlet chamber
- 6, Diffuser casing (used for CHM1-2/2-2/4-3)
- 7, Inducer
- 7a, Neck ring cover
- 7b, Neck ring
- 8, Nut
- 9, Washer
- 10, First stage impeller cover
- 11, Impeller (W/O this part in 2 stages pump)
- 12, Diffuser
- 13, Impeller Sleeve (used for CHM1-2/2-2/4-3)
- 14, Top diffuser
- 15, Adjusting washer (W/O this part in CHM1,2)
- 16, Mechanical seal
- 17, O-Ring 115 x 3.55
- 18, Seal Plate
- 19, Motor
- 20, Base plate
- 21, Screw
- 22, Support diffuser (Used for CHM1-6, CHM2-4/5/6, CHM4-4/5/6)
- 23, Wear resistant bearing (Used for CHM1-6, CHM2-4/5/6, CHM4-4/5/6)
- 24, Impeller sleeve(s) (Used for CHM1-6, CHM2-4/5/6, CHM4-4/5/6)

Fig 1-A E-CHM1, 2, 4-190103

