	Product Information CDM15-15	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/07/26
Project Name		Client Name	DPA
Item NO		Client Addr.	
		Contacts	Alireza
		Contact	

Part NO.	1100090774
----------	------------

Product Picture	Note
	<p>CDM/CDMF pumps are new generation, high efficiency, non-self-priming vertical multistage centrifugal pumps (Abbr. as pumps). It referred to European standard, adopted entirely new industrial design, efficiency achieved $MEI \geq 0.7$. It is energy saving, low noise, environment friendly, compact design, beautiful shape, light weight, easy for service, high reliability.</p>

Nameplate parameters

flow	15 m ³ /h
head	178 m
Efficiency	71
speed	2900
number of stages	15

technology

Pump rotator speed	2900
Nameplate standards	CE
Pump version	2

Material

Impeller	304
Rubber code	P
Inlet&outlet chamber	304
Material Code	S

Installation


Connection Code	F
Maximum Pressure/Temperature	22 bar/120 °C
Maximum Pressure/Temperature	22 bar/-15 °C
Flange Standard	DIN
Pressure Class	PN25
Inlet & outlet	DN50

Medium

Medium Temperature normal	-15°C+70°C
Medium Temperature high t	-15°C+120°C
Maximum Environment Temper	40°C

Motor

Number of Motor Phase	Three Phase
Protection Class	IP55
Insulation Class	F
Motor Power	15KW
Power Frequency	50Hz
Rated Voltage (V)	380V
Rated Current (A)	27.9A
Energy Efficiency Level	IE3

	Product Information CDM15-15	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
		Contact	86-571-88637351
		Date	2022/07/26
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Seal

Mechanical Seal CDLA-16/WBF14

Others

Weight (kg) 172






Performance Curve CDM15-15

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/07/26
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name

Item NO

The hydraulic performance curve have been tested with Clean Water at 20°C, density 1000kg/m³, and at 1bar atmospheric pressure. GB32162016 Grande 3B

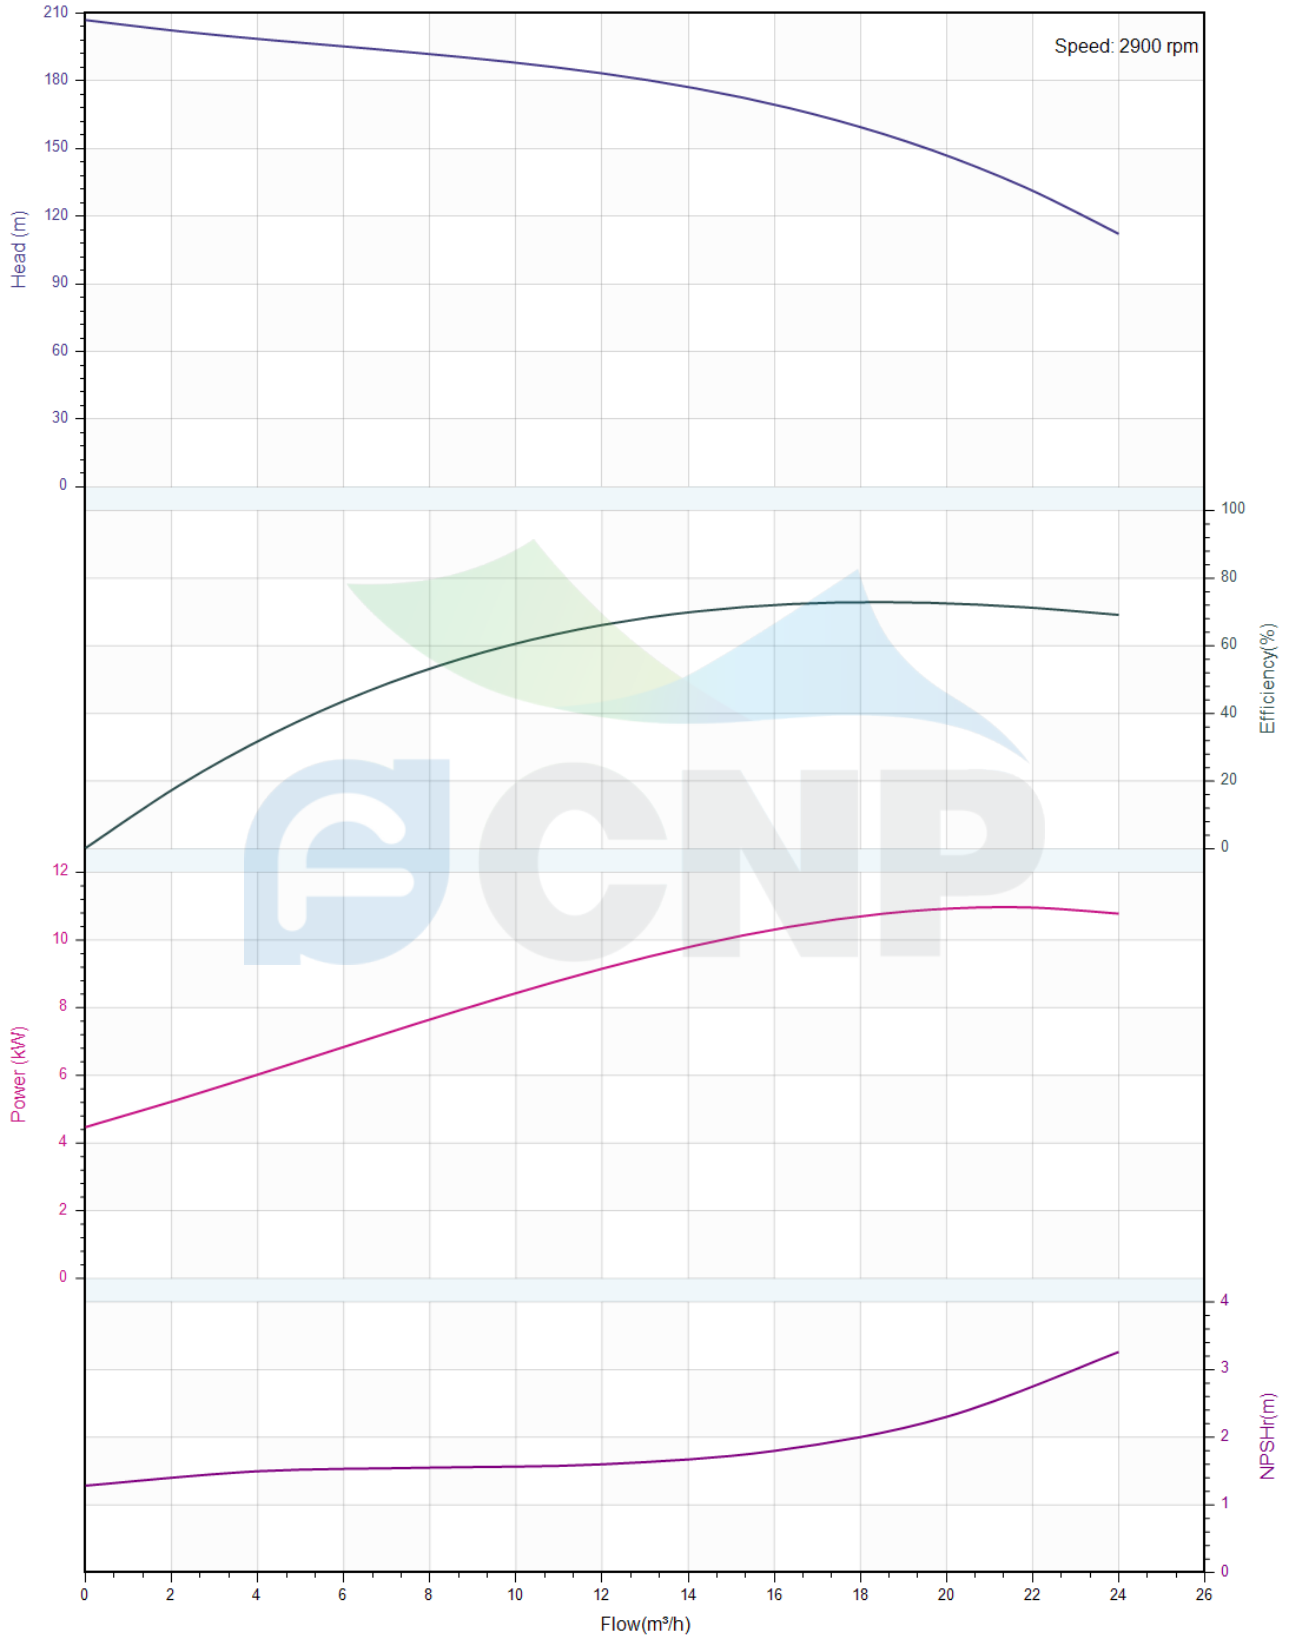



Pump Technical Parameters CDM15-15

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/07/26
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name


Item NO

Rated parameters

Pump model	CDM15-15
Part NO.	1100090774
Rated flow	15 m ³ /h
Rated head	178 m
Rated efficiency (%)	71
Power (kW)	10.2
NPSHr (m)	1.8
Speed (rpm)	2900
Max impeller diameter (mm)	105

Medium

Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m ³)	1000
Viscosity (mm ² /s)	1

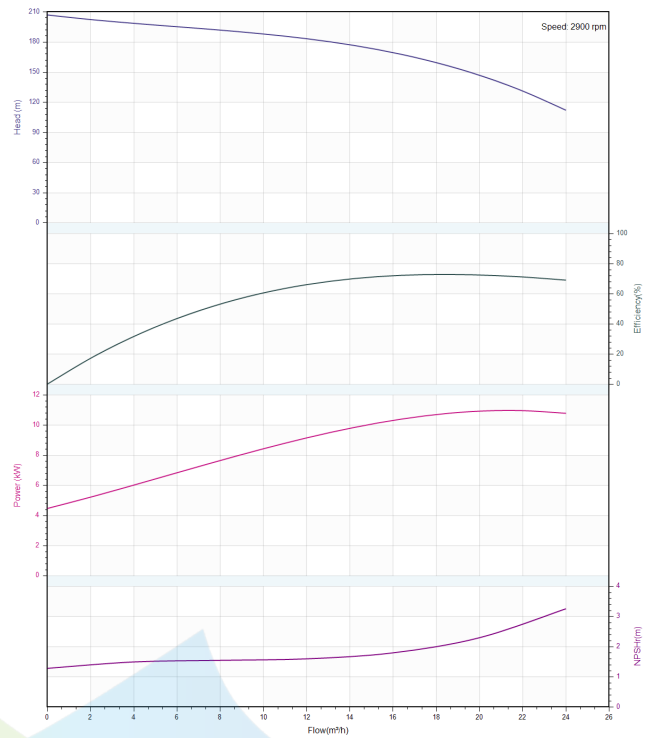




Structure picture CDM15-15

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/07/26
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name

Item NO

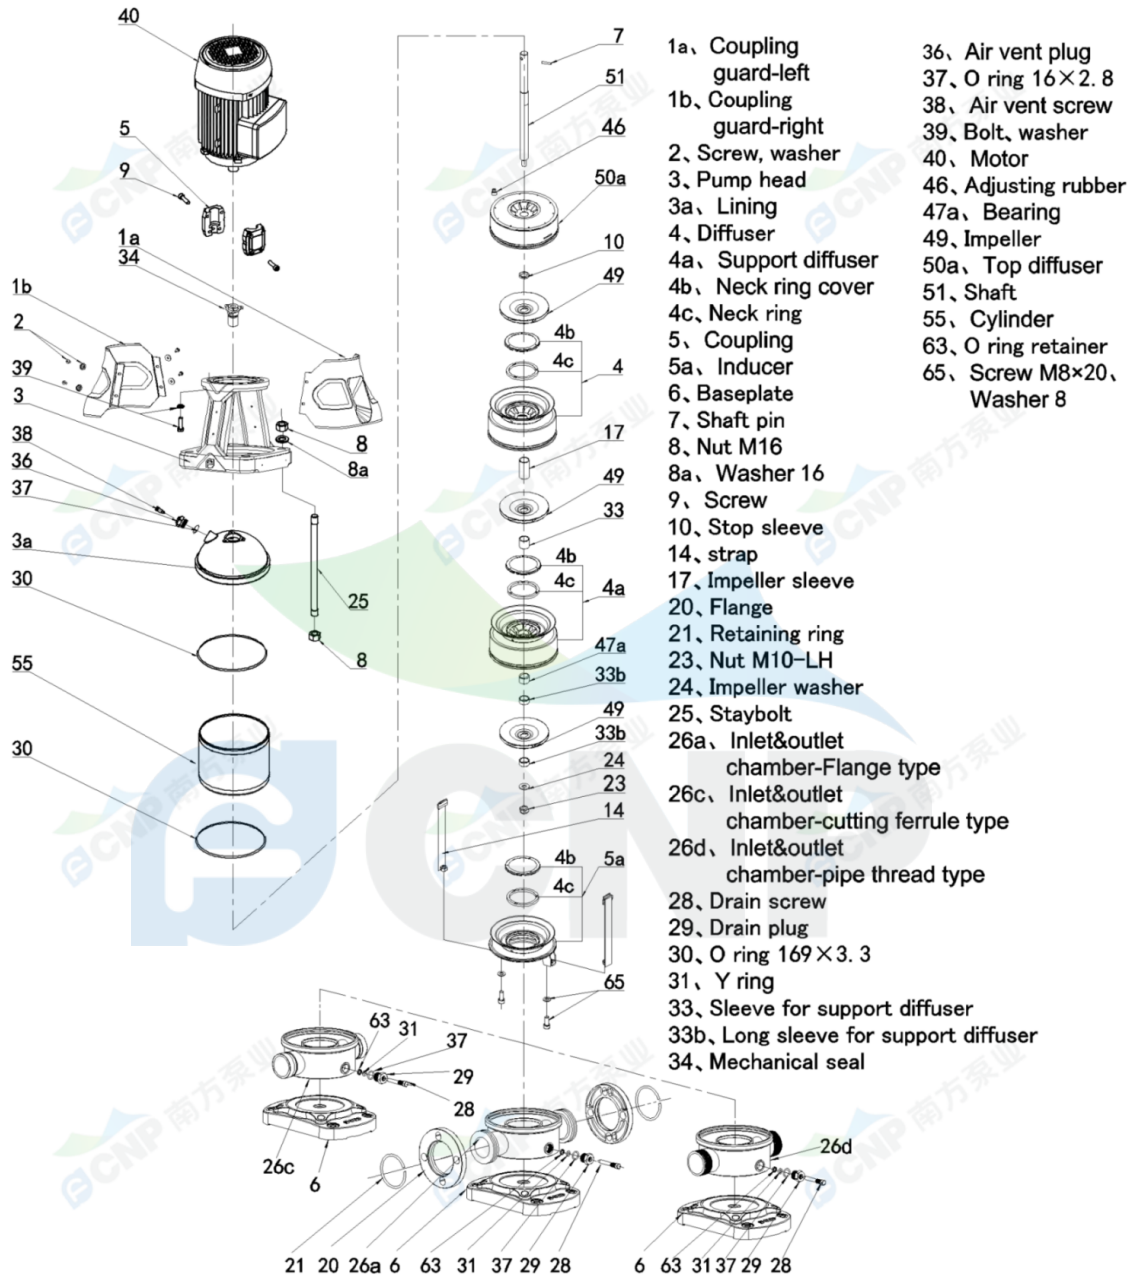

- 1a、 Coupling guard-left
- 1b、 Coupling guard-right
- 2、 Screw, washer
- 3、 Pump head
- 3a、 Lining
- 4、 Diffuser
- 4a、 Support diffuser
- 4b、 Neck ring cover
- 4c、 Neck ring
- 5、 Coupling
- 5a、 Inducer
- 6、 Baseplate
- 7、 Shaft pin
- 8、 Nut M16
- 8a、 Washer 16
- 9、 Screw
- 10、 Stop sleeve
- 14、 strap
- 17、 Impeller sleeve
- 20、 Flange
- 21、 Retaining ring
- 23、 Nut M10-LH
- 24、 Impeller washer
- 25、 Staybolt
- 26a、 Inlet&outlet chamber-Flange type
- 26c、 Inlet&outlet chamber-cutting ferrule type
- 26d、 Inlet&outlet chamber-pipe thread type
- 28、 Drain screw
- 29、 Drain plug
- 30、 O ring 169×3. 3
- 31、 Y ring
- 33、 Sleeve for support diffuser
- 33b、 Long sleeve for support diffuser
- 34、 Mechanical seal
- 36、 Air vent plug
- 37、 O ring 16×2. 8
- 38、 Air vent screw
- 39、 Bolt, washer
- 40、 Motor
- 46、 Adjusting rubber
- 47a、 Bearing
- 49、 Impeller
- 50a、 Top diffuser
- 51、 Shaft
- 55、 Cylinder
- 63、 O ring retainer
- 65、 Screw M8×20、 Washer 8



Physical picture
CDM15-15

Manufacturer	CNP
Address	Yuhang District, Hangzhou, Zhejiang,
Contact	86-571-88637351
Date	2022/07/26
Client Name	DPA
Client Addr.	
Contacts	Alireza
Contact	

Project Name

Item NO

