



**NSP series**

Installation sketch

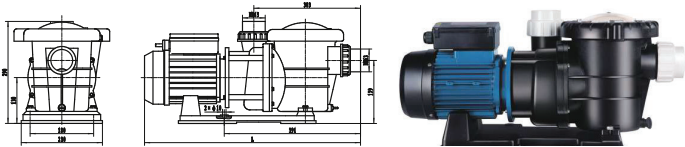

Model	NSP150	NSP200	NSP250	NSP300
L	483	483	505	505

Performance curve

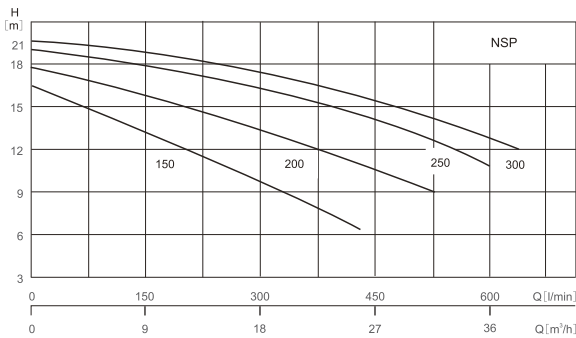


Performance table


Model	P1		Max. Head [m]	Max. Flow [m³/h]	Flow Q	Head H [m]	150	300	450	600
	[kW]	[HP]					[l/min]	[m³/h]	[m³/h]	[m³/h]
NSP150	1.1	1.5	16.5	26			13.2	9.7		
NSP200	1.5	2.0	18	31			16	13.3	10.6	
NSP250	1.85	2.5	19	36			17.9	16.3	14.1	10.7
NSP300	2.2	3.0	19.5	38			18.8	17.4	15.5	12.8

**NSW series**

Installation sketch

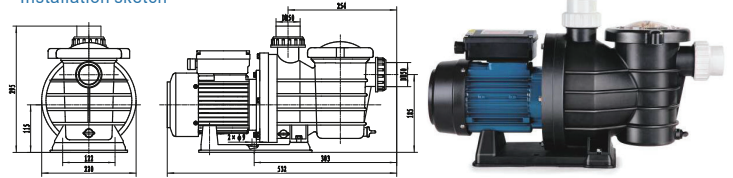

Performance curve

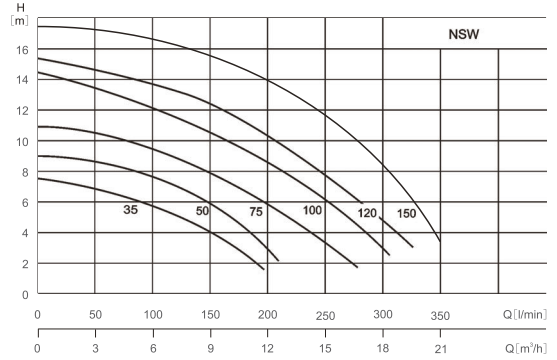

Performance table

Model	P1		Max. Head [m]	Max. Flow [m³/h]	Flow Q	Head H [m]	50	100	150	200	250	300
	[kW]	[HP]					[l/min]	[m³/h]	[m³/h]	[m³/h]	[m³/h]	[m³/h]
NSW35	0.25	0.35	7.5	11			3	6	9	12	15	18
NSW50	0.37	0.5	9	13			7	5.6	4			
NSW75	0.55	0.75	11	17			8.7	7.7	6	3		
NSW100	0.75	1.0	14.5	19			10.5	9.4	8	5.8	3	
NSW120	0.9	1.2	15.5	20			13.5	12.2	10.7	8.5	6.2	3
NSW150	1.1	1.5	17.5	21			14.7	13.7	12.6	10.3	7.8	4.9
NSW150	1.1	1.5	17.5	21			17.3	16.8	15.5	14	11.8	8.5